
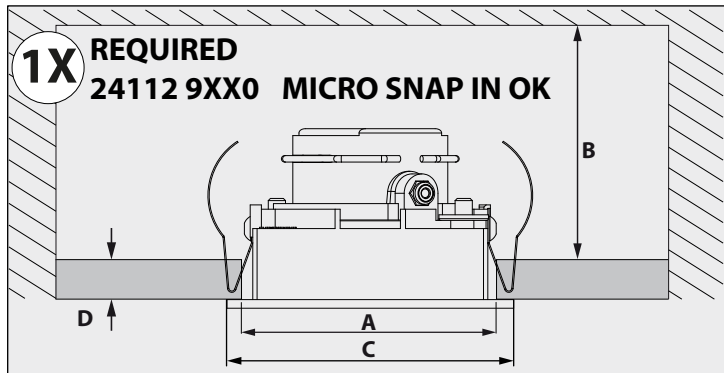


MICROGRID IN 1 FRAME


DEEL
PARTIE
TEIL
PART
PARTE
PARTE **A**

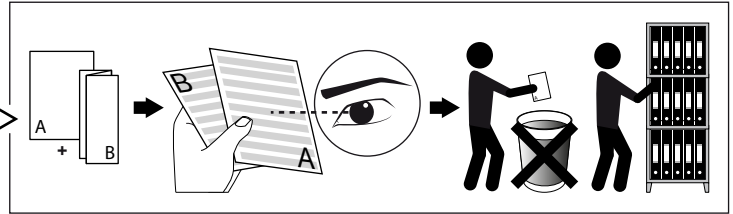


		mm		
	A	59x62		X
	B	80		✓
	C	67x67		✓
	D	MIN 12 - MAX 25		✓








IP20
 Beschermtd tegen vaste voorwerpen die groter zijn dan 12 mm
 Protégé contre les objets solides de plus de 12 mm
 Geschützt gegen Festkörper größer als 12 mm
 Protected against solid objects greater than 12 mm
 Protegido contra objetos sólidos superiores a 12 mm
 Protetto contro oggetti solidi più grandi di 12 mm



Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)
 Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)
 Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)
 Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)
 Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)
 Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)

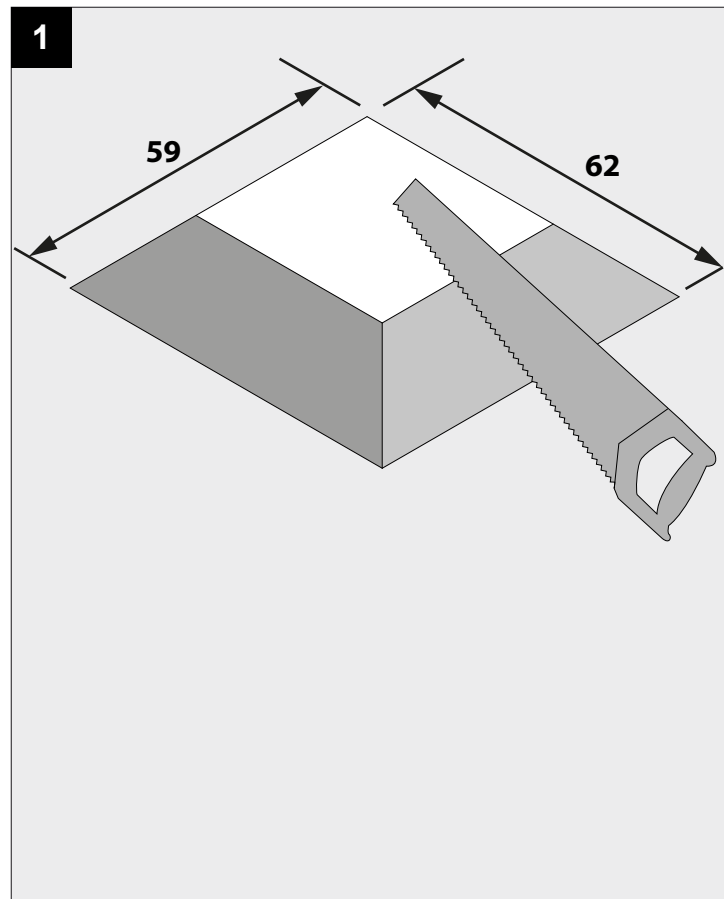

Toestel niet geschikt om te worden afgedekt met thermische isolatie.
 Luminaires non appropriées pour recouvrement d'un matériau isolant thermique.
 Das Gerät/Die Leuchte darf nicht abgedeckt werden mit thermischer Isolation.
 Luminaire not suitable for covering with insulating material.
 Luminaria no apta para cubrir con material aislante.
 Apparecchio non adatto per essere coperto da materiale isolante.

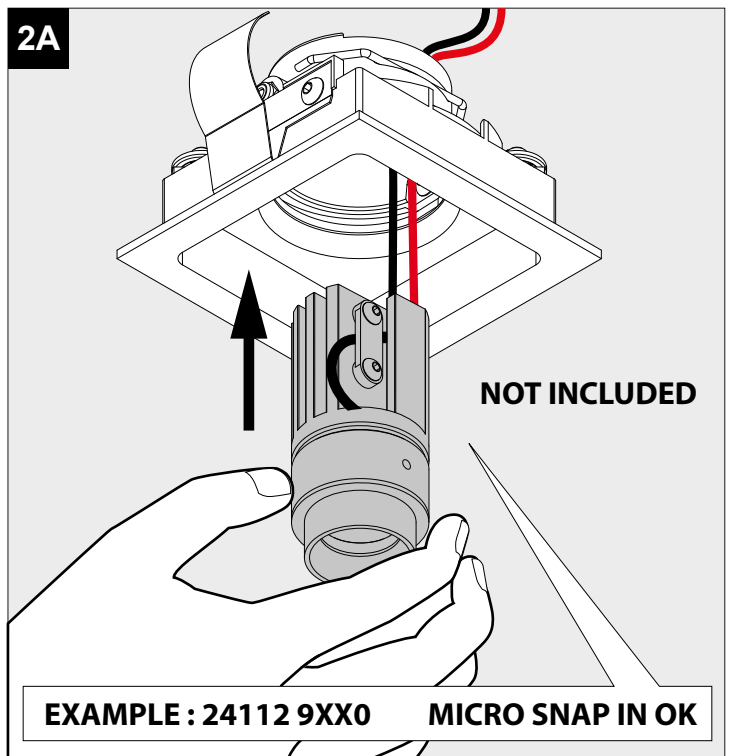

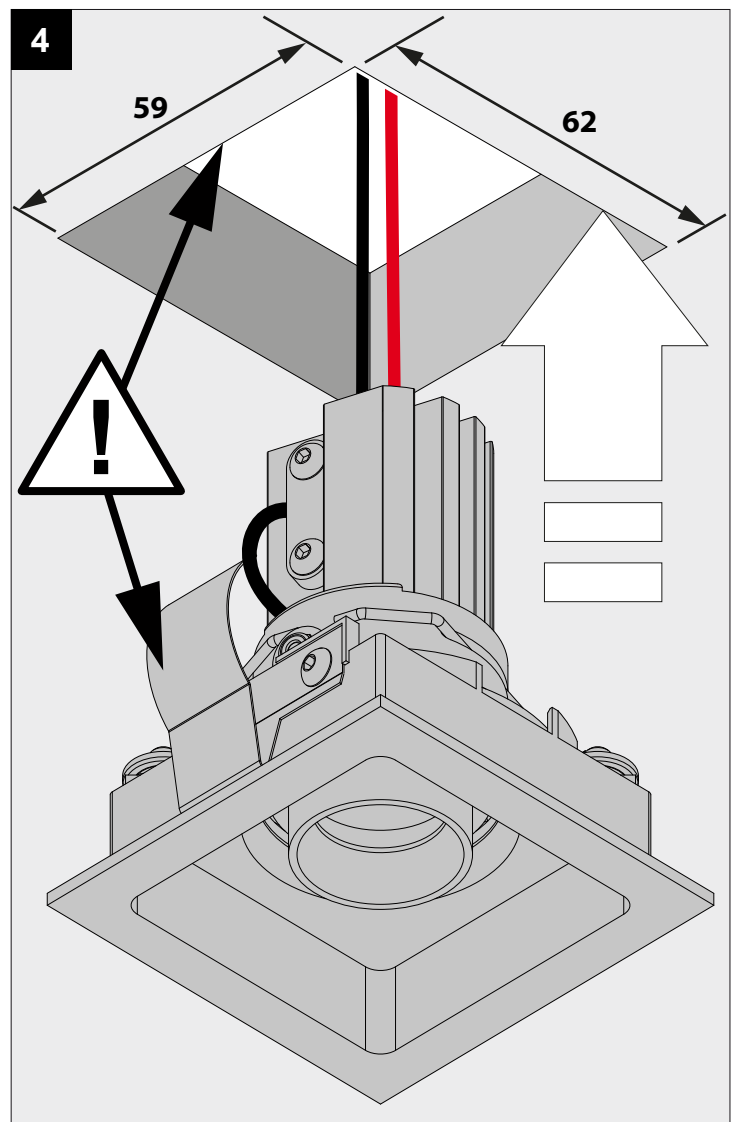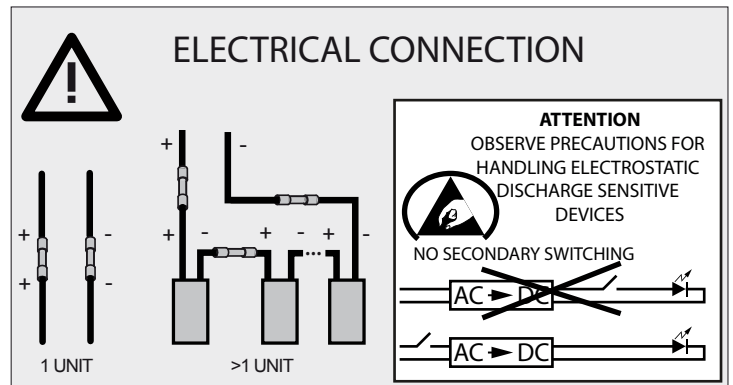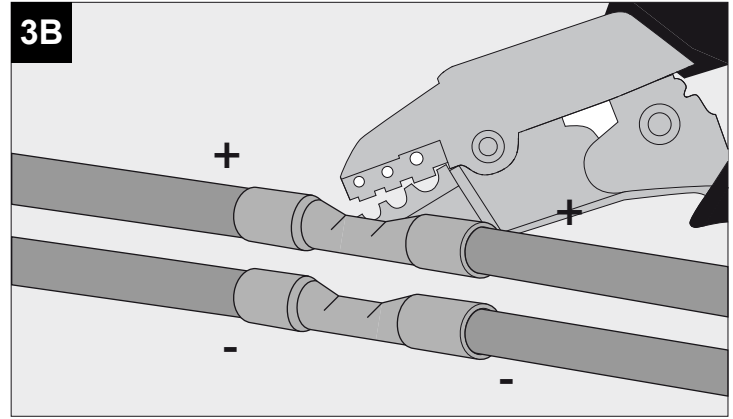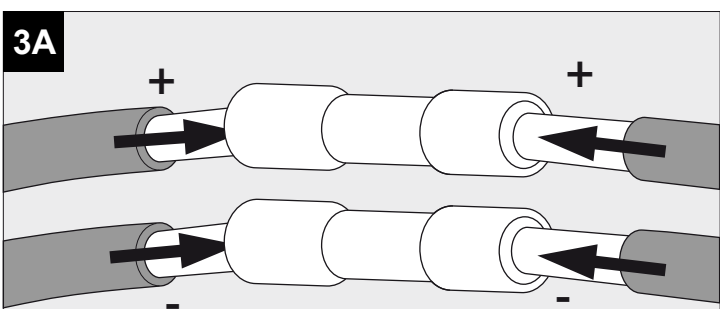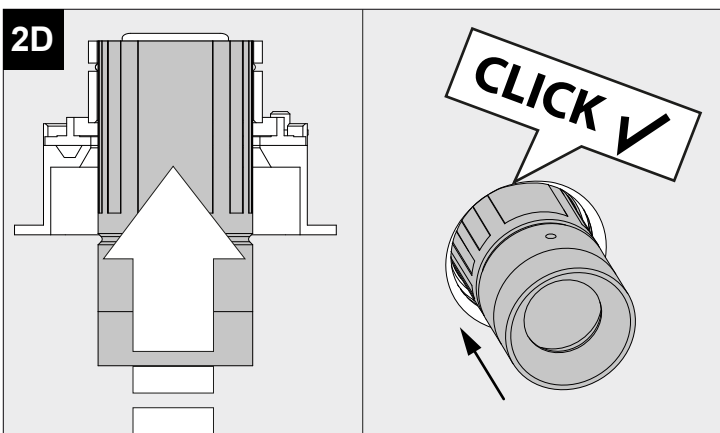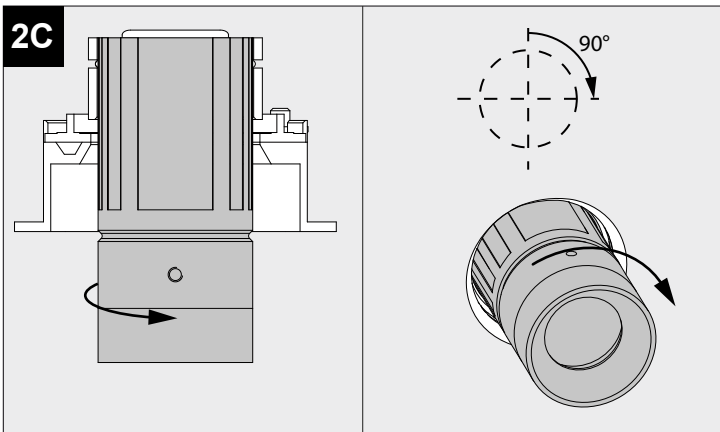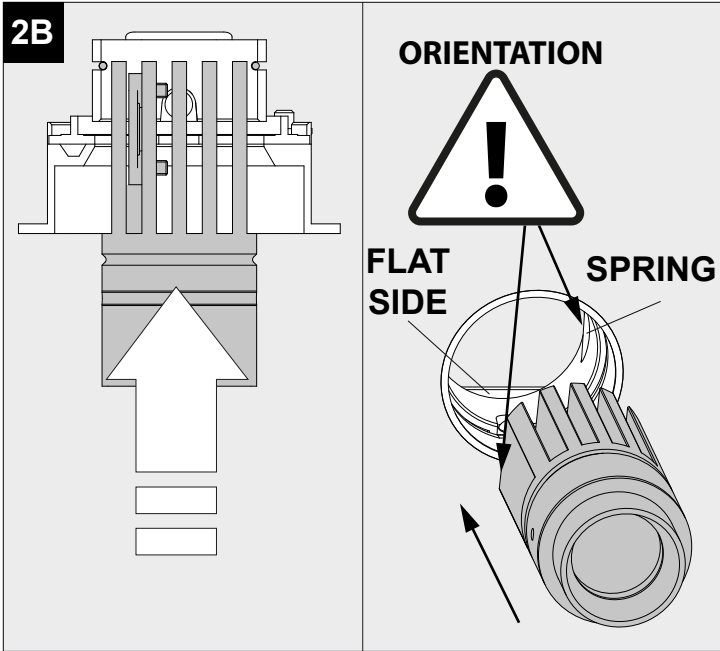

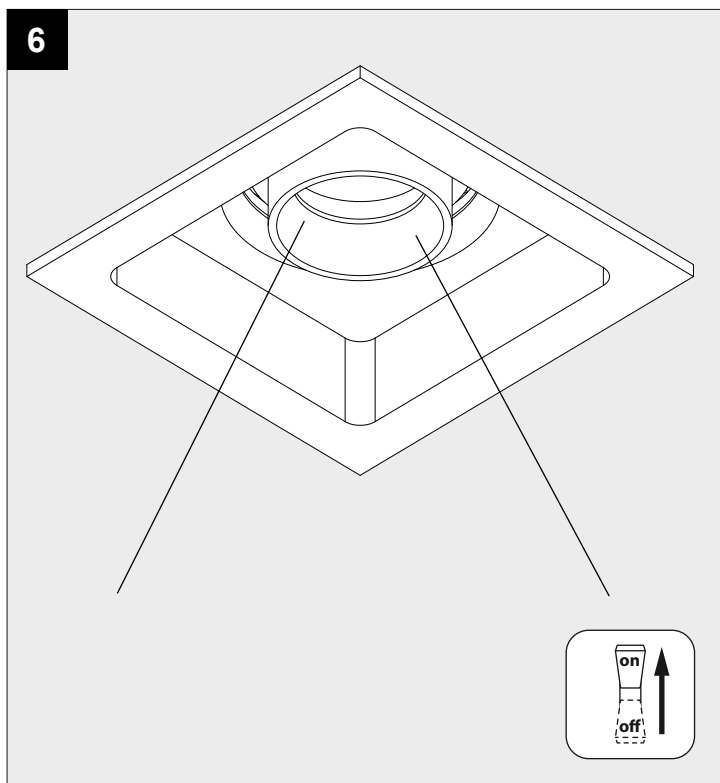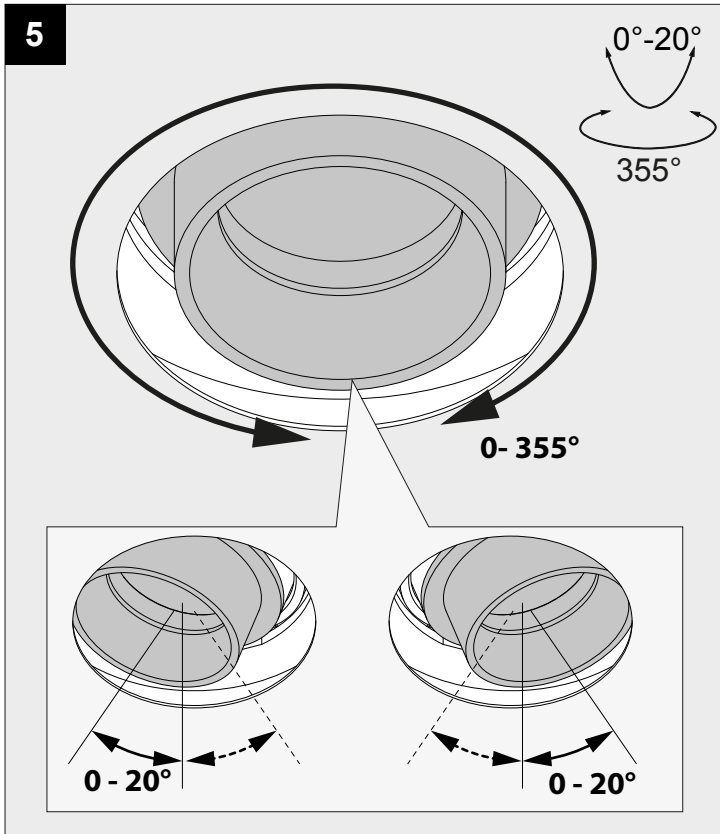

De verlichtingsbron van dit verlichtingstoestel zal enkel door de fabrikant of door de fabrikant aangestelde installateur vervangen worden.

La source lumière de cet appareil ne sera remplacée que par l'entrepri-
se ou par un agent reconnu.

Das enthaltene Leuchtmittel sollte nur durch entsprechendes Fachper-
sonal ersetzt werden.

The light source contained in this luminaire shall only be replaced by
the manufacturer or his service agent.

La fuente de iluminación que tiene esta luminaria sólo puede rempla-
zarse por el fabricante o por un instalador autorizado.

La sorgente luminosa incorporata in questo apparecchio può essere
sostituita solo dal produt tore, da un suo centro assistenza oppure da
una persona in possesso della necessaria abilitazione.

MICRO SNAP-IN OK 92715 ◇

6 24112 9210◇

◇ = B / W

MICRO SNAP-IN OK 92730 ◇

6 24112 9220◇

◇ = B / W

MICRO SNAP-IN OK 93015 ◇

6 24112 9310◇

◇ = B / W

MICRO SNAP-IN OK 93030 ◇

6 24112 9320◇

◇ = B / W

MICRO SNAP-IN OK 93515 ◇

6 24112 9510◇

◇ = B / W

MICRO SNAP-IN OK 93530 ◇

6 24112 9520◇

◇ = B / W



Application

Finishing section to be used with DELTA LIGHT® rough-in housing or plasterframe

Ceiling Thickness

For 5/8" ceiling standard up to 7/8"

Light source

4,1W POWERLED WHITE PER LED

Power Supply

Current controled class 2 power supply required. (supplied with housing or plasterframe)
Max 350mA, typical forward voltage 11,8V. Do not interconnect in parallel!

Connector

Housing connection through pre-installed snap-in connector

Specification features

Construction powder coated aluminum
Pre-installed springs for easy installation
Suitable for dry and damp locations
Protected against solid objects greater than 12mm ➡ IP20

Dimensions

Height: 67mm = 2" - 5/8
Diameter: 67mm x 67mm = 2" - 5/8 x 2" - 5/8
Ceiling Cut out: 62mm x 59mm = 2" - 7/16 x 2" - 5/16




Accessories

Micro Visor 10034 0010












Required

Microgrid in 1 frame 24115 0000
or
Microgrid in 2 frame 24116 0000
or
Microgrid in 3 frame 24117 0000

LED Power supply 350mA-DC 19W DIM13 6 300 41 ED13
or
LED Power supply 350mA-DC 19W DIM1 6 300 44 ED1
or
LED Power supply 350mA-DC 11W DIM8 6 300 46 ED8
or
LED Power supply 350mA-DC 13W DIM12 6 300 70ED12

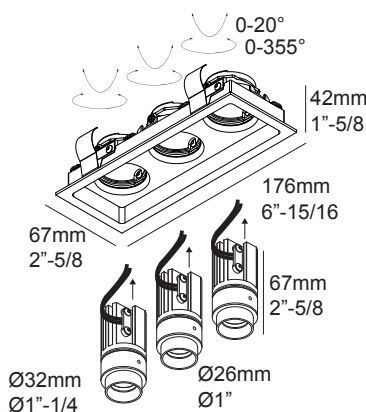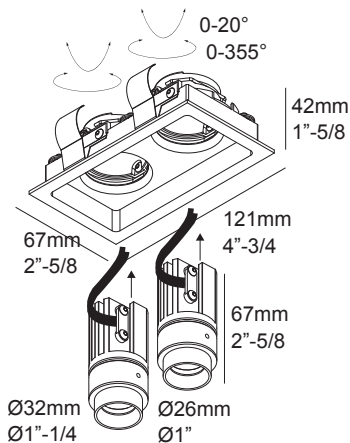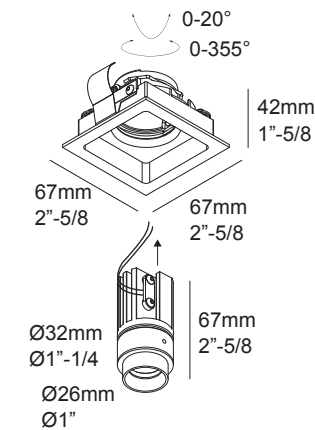

 **INSTALLATION LUMINAIRE**

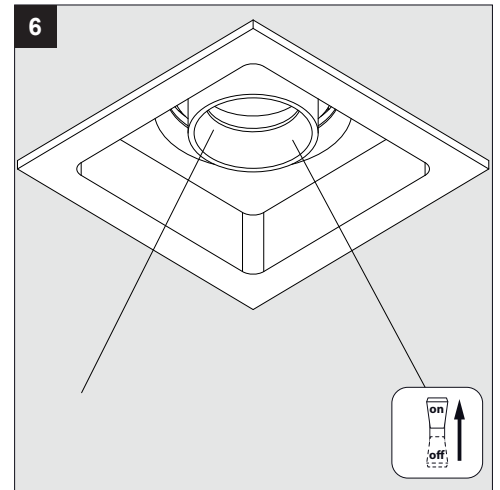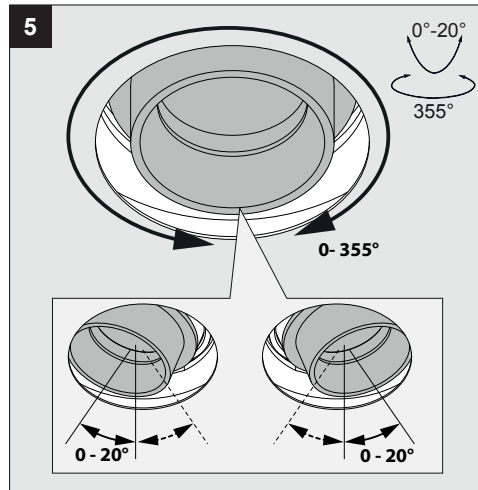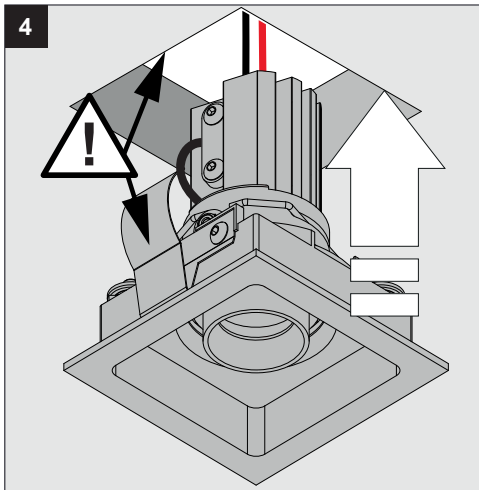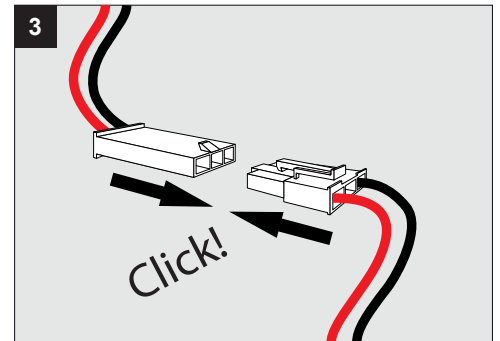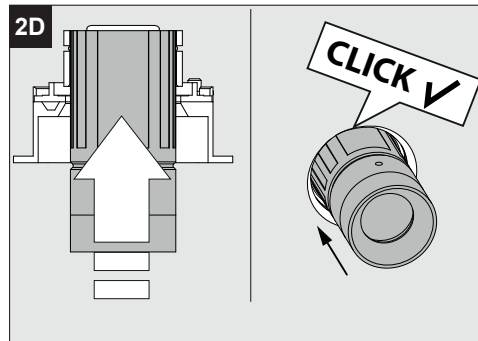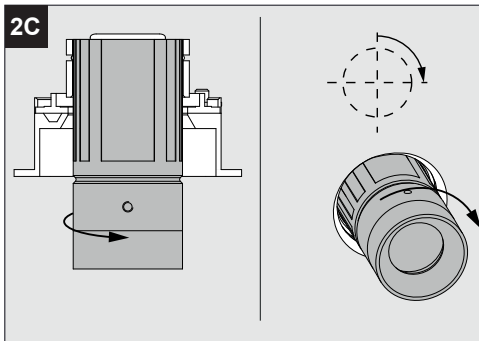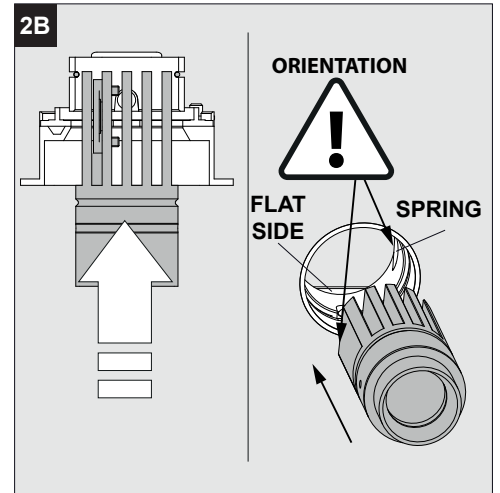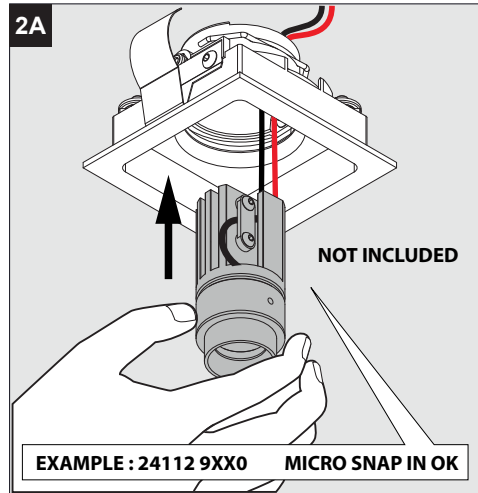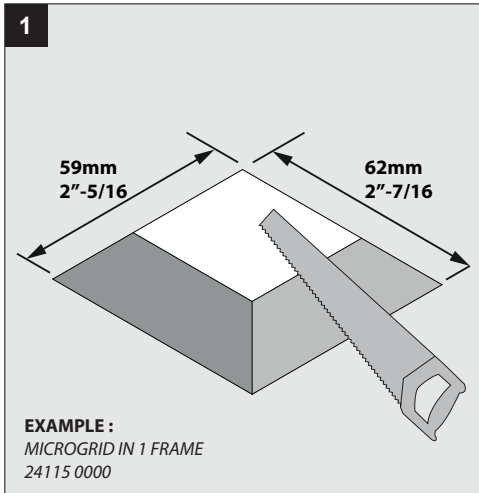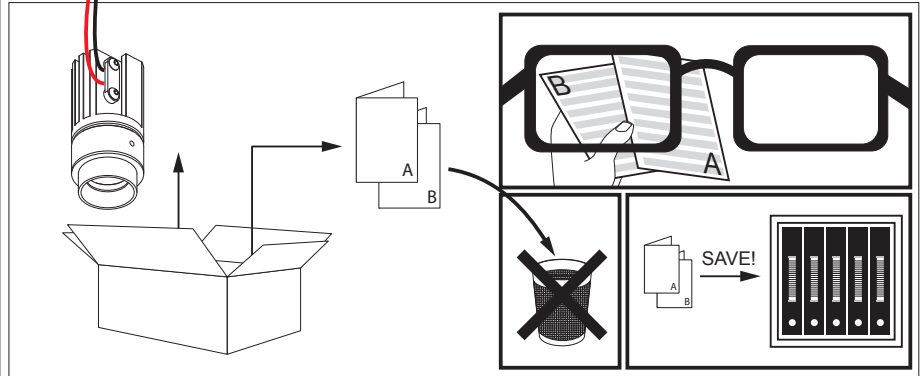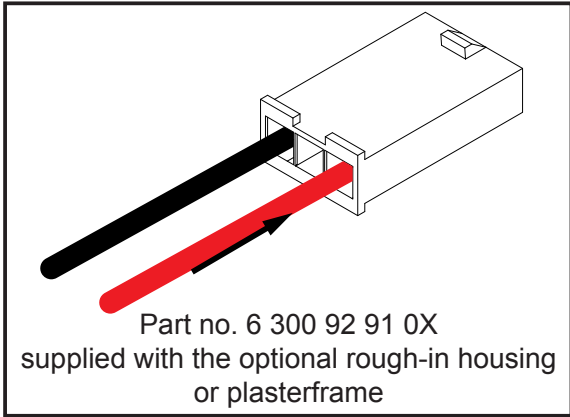

INSTALLATION LUMINAIRE

