

- CARREE ST LED IP 92733 ◇◇  
6 11045 9220 ◇  
◇ = W
- CARREE ST LED IP 93033 ◇◇  
6 11045 9320 ◇  
◇ = W
- CARREE ST LED IP 93533 ◇◇  
6 11045 9520 ◇  
◇ = Ww



**Application**

Finishing section to be used with DELTA LIGHT® rough-in housing or plasterframe.

**Ceiling Thickness**

For 5/8" ceiling standard up to 7/8"

**Light source**

1 x 10,4 - 15W POWERLED WHITE

**Power Supply**

Included in rough-in or remodel option.

**Specification features**

- Body fabricated of surface treated aluminum
- Pre-installed springs for easy installation
- Housing and trim connection through pre-installed snap-in connector
- Suitable for dry and damp locations

**Dimensions**

- Height: 75 mm = 3"
- Width: 86 mm x 86 mm = 3"-3/8 x 3"-3/8
- Ceiling Cut out: 75mm x 75mm = 3" x 3"

**Required options**

- New construction
- Housing for IC and/or airtight applications


Range	Installation type	Power/Dimming	Voltage	Mounting Option
			1 - 120V 2 - 277V 3 - 120-277V	0 - No bar hangers 1 - Bar hangers standard
6 202	7 - IC AT Housing S	102 - 10,5W mains dimmable (ELV)	05 1 - 120V	1 - Bar hangers standard
6 202	7 - IC AT Housing S	108 - 10,5W 0-10V dimmable	05 3 - 120-277V	1 - Bar hangers standard
6 202	7 - IC AT Housing S	122 - 15W Lutron dimmable	05 3 - 120-277V	1 - Bar hangers standard

- New construction
- Plasterframe for NON-IC applications







Range	Installation type	Power/Dimming	Voltage	Mounting Option
			1 - 120V 2 - 277V 3 - 120-277V	0 - No bar hangers 1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	102 - 10,5W mains dimmable (ELV)	05 1 - 120V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	103 - 14,7W mains dimmable (ELV)	05 1 - 120V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	108 - 10,5W 0-10V dimmable	05 1 - 120V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	108 - 10,5W 0-10V dimmable	05 2 - 277V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	109 - 14,7W 0-10V dimmable	05 1 - 120V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	109 - 14,7W 0-10V dimmable	05 2 - 277V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	122 - 15W Lutron dimmable	05 1 - 120V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	122 - 15W Lutron dimmable	05 2 - 277V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	123 - 16W Lutron dimmable	05 1 - 120V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	123 - 16W Lutron dimmable	05 2 - 277V	1 - Bar hangers standard

**Remodel**

Range	Installation type	Power/Dimming	Voltage	Spacings
			1 - 120V 2 - 277V 3 - 120-277V	1- Standard spacings 1- Marked spacings
6 202	9 - REMODEL	122 - 15W Lutron dimmable	1 - 120V	1- Standard spacings
6 202	9 - REMODEL	122 - 15W Lutron dimmable	2 - 277V	1- Standard spacings
6 202	9 - REMODEL	123 - 16W Lutron dimmable	1 - 120V	1- Marked spacings
6 202	9 - REMODEL	123 - 16W Lutron dimmable	2 - 277V	1- Marked spacings
6 202	9 - REMODEL	19 - 10W mains dimmable (ELV)	1 - 120V	1- Standard spacings
6 202	9 - REMODEL	20 - 10W 0-10V DIM	1 - 120V	1- Standard spacings
6 202	9 - REMODEL	20 - 10W 0-10V DIM	2 - 277V	1- Standard spacings
6 202	9 - REMODEL	21 - 14W mains dimmable (ELV)	1 - 120V	1- Marked spacings
6 202	9 - REMODEL	69 - 14W 0-10V DIM	1 - 120V	1- Marked spacings
6 202	9 - REMODEL	69 - 14W 0-10V DIM	2 - 277V	1- Marked spacings

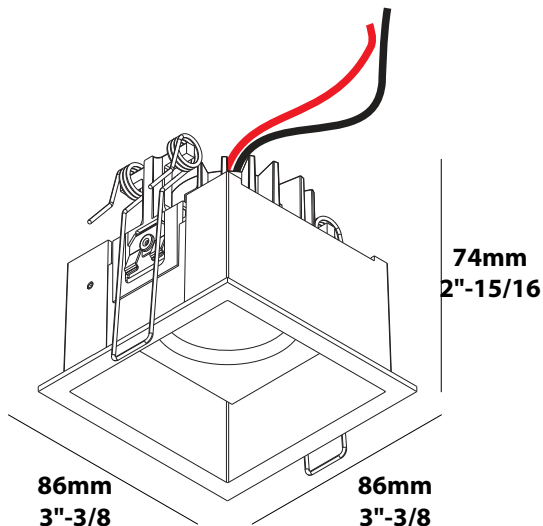

 **INSTALLATION LUMINAIRE**

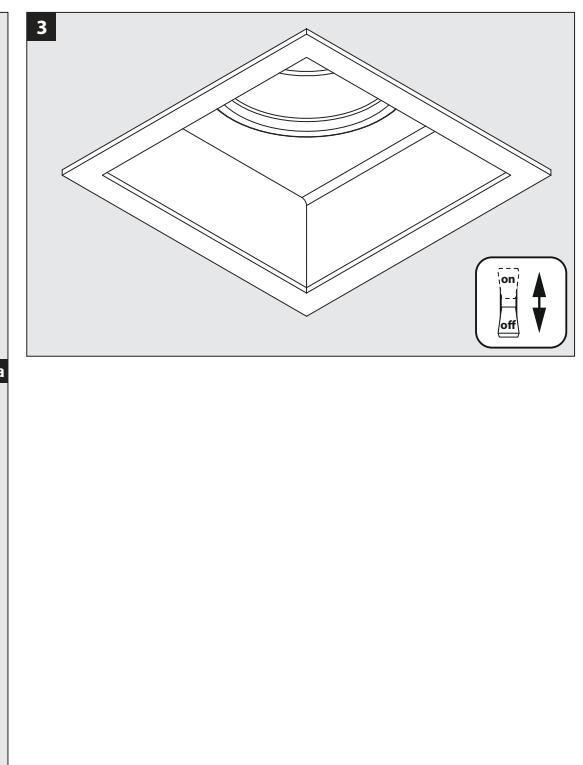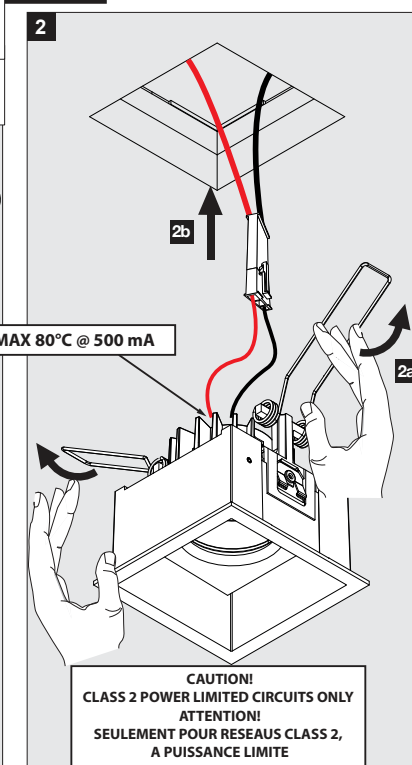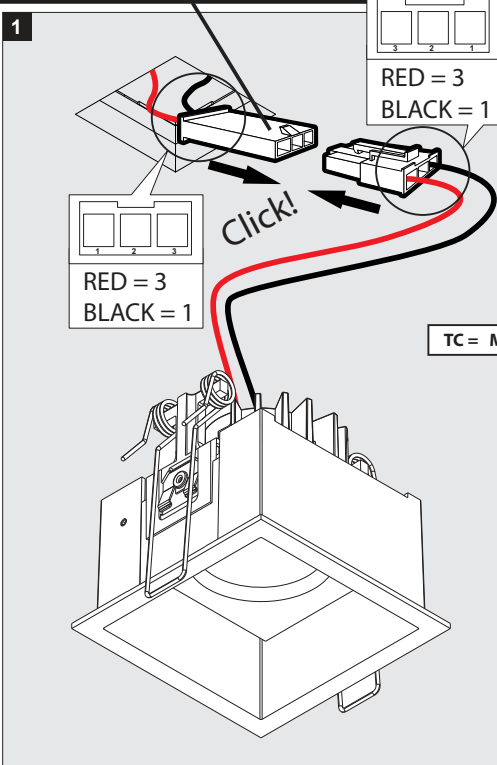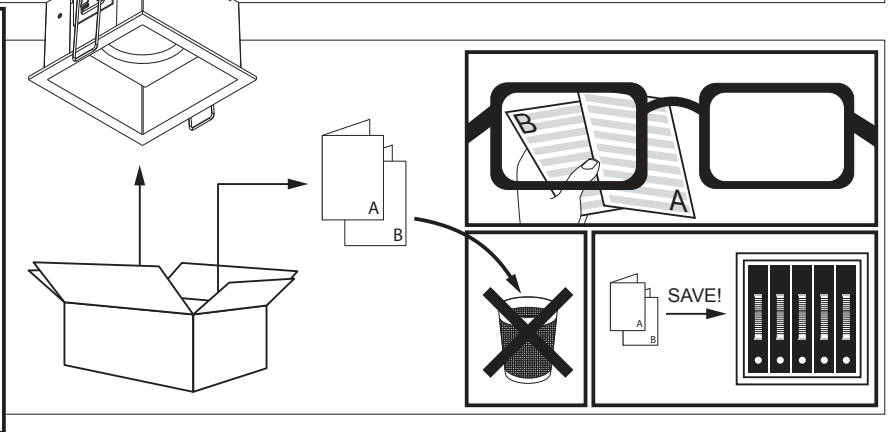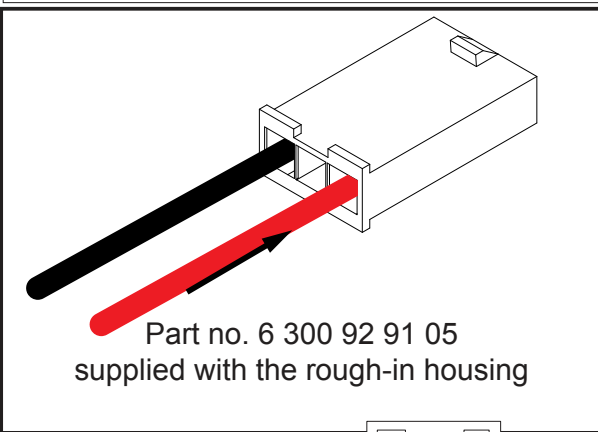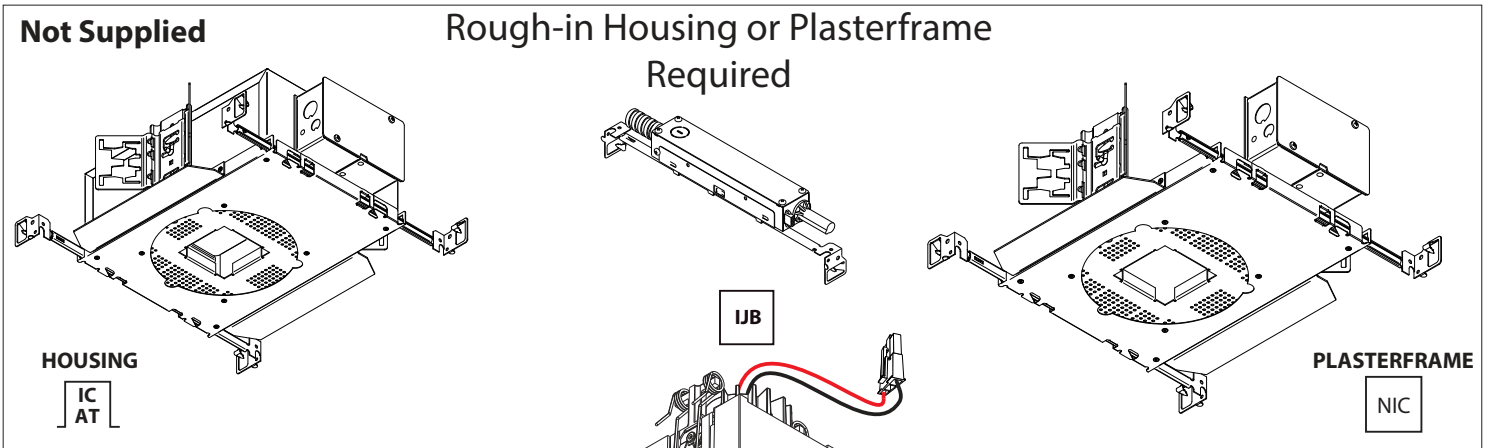

**CAUTION!**  
CLASS 2 POWER LIMITED CIRCUITS ONLY  
**ATTENTION!**  
SEULEMENT POUR RESEAU CLASS 2,  
A PUISSANCE LIMITE  
**MAX 500mA DC**  
(red/rouge: +, black/noir: -)



# INSTALLATION IJB

