



MINIGRID IN TRIMLESS 1 FRAME ◇

6 202 73 01 ◇

◇ = W / B

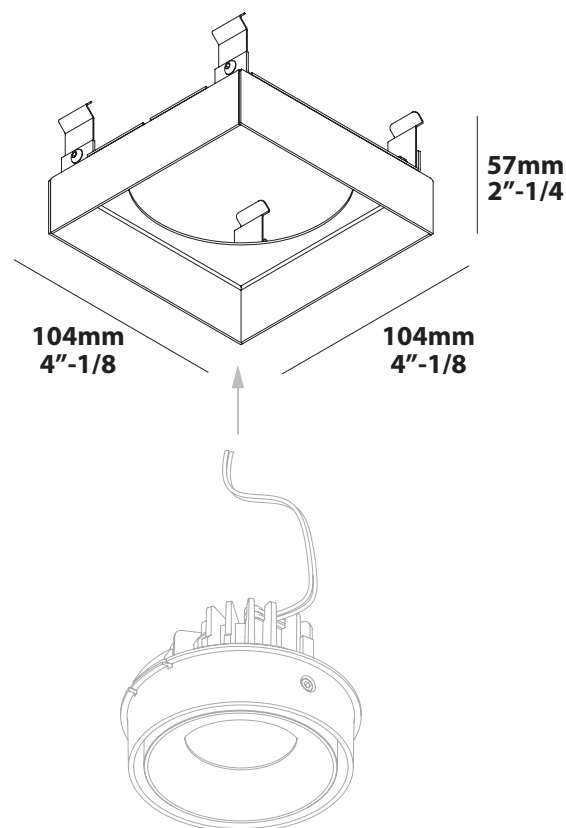

Application

Finishing section to be used with DELTA LIGHT® rough-in housing or Plasterframe.

Ceiling Thickness

For 5/8" ceiling standard up to 7/8"

Specification features

Housing fabricated of surface treated aluminum
 Provided with 4 spring clips to be clipped in housing or plasterframe
 Suitable for dry and damp locations.

Light source (see requirement MINIGRID SNAP-IN REO)

One 9,3W max POWERLED WHITE

Power Supply (see requirement MINIGRID SNAP-IN REO)

Current controlled class 2 power supply required. (supplied with housing or plasterframe)
 500mA: 18V typical for use with MINIGRID SNAP-IN REO
 Do not interconnect in parallel!

Dimensions

Height: 57mm = 2"-1/4
 width: 104mm x 104mm = 4"-1/8 x 4"-1/8

Required options for non-class 2 power limited circuits

Housing for NIC and/or airtight applications

Range	Installation type	Lamp Source	Opening	Voltage		Mounting Option	
				1 - 120V	2 - 277V	0 - No bar hangers	1 - Bar hangers standard
6	202	7 - IC AT Housing S	43 - 500mA-DC 12W ED1	19 - MGITR1 MTK	3 - 120-277V	1 - Bar hangers standard	
6	202	7 - IC AT Housing S	49 - 500mA-DC 10W	19 - MGITR1 MTK	1 - 120V	1 - Bar hangers standard	
6	202	7 - IC AT Housing S	72 - 500mA-DC 19W ED10	19 - MGITR1 MTK	3 - 120-277V	1 - Bar hangers standard	
6	202	7 - IC AT Housing S	90 - 500mA-DC 15W ED8	19 - MGITR1 MTK	1 - 120V	1 - Bar hangers standard	



Plasterframe for NIC applications

Range	Installation type	Lamp Source	Opening	Voltage		Mounting Option	
				1 - 120V	2 - 277V	0 - No bar hangers	1 - Bar hangers standard
6	202	01 - NIC Plasterframe S	43 - 500mA-DC 12W ED1	19 - MGITR1 MTK	3 - 120-277V	1 - Bar hangers standard	
6	202	01 - NIC Plasterframe S	49 - 500mA-DC 10W	19 - MGITR1 MTK	1 - 120V	1 - Bar hangers standard	
6	202	01 - NIC Plasterframe S	72 - 500mA-DC 19W ED10	19 - MGITR1 MTK	3 - 120-277V	1 - Bar hangers standard	
6	202	01 - NIC Plasterframe S	90 - 500mA-DC 15W ED8	19 - MGITR1 MTK	1 - 120V	1 - Bar hangers standard	

 **INSTALLATION LUMINAIRE**

Not Supplied

Rough-in Housing or Plasterframe Required

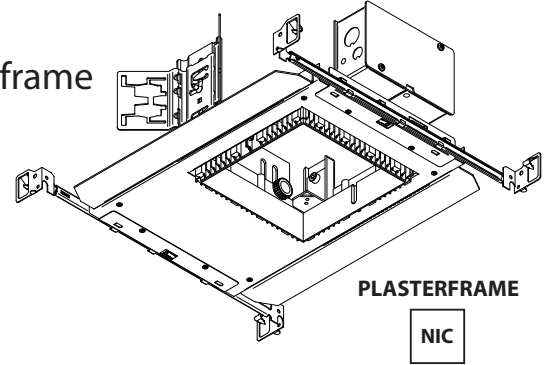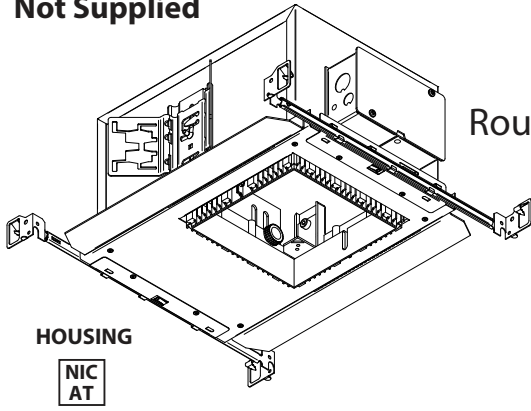

Accessory set

