



MINIGRID IN TRIMLESS 2 FRAME ◇

6 202 73 02 ◇

◇ = W / B

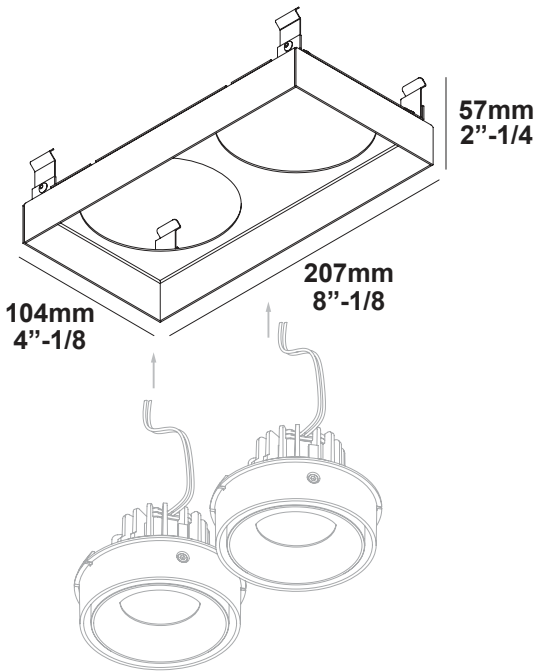

Application

Finishing section to be used with DELTA LIGHT® rough-in housing or Plasterframe.

Ceiling Thickness

For 5/8" ceiling standard up to 7/8"

Specification features

Housing fabricated of surface treated aluminum
 Provided with 4 spring clips to be clipped in housing or plasterframe
 Suitable for dry and damp locations

Light source (see requirement MINIGRID SNAP-IN REO)

Two 9,3W max POWERLED WHITE

Power Supply (see requirement MINIGRID SNAP-IN REO)

Current controled class 2 power supply required. (supplied with housing or plasterframe)
 500mA: 18V typical for use with MINIGRID SNAP-IN REO
 Do not interconnect in parallel!

Dimensions

Height: 57mm = 2"-1/4
 width: 104mm x 207mm = 4"-1/8 x 8"-1/8

Required options for non-class 2 power limited circuits

Housing for NIC and/or airtight applications


Range	Installation type	Lamp Source	Opening	Voltage		Mounting Option	
				1 - 120V 2 - 277V 3 - 120-277V	0 - No bar hangers 1 - Bar hangers standard		
6 202	2 - NIC AT Housing M	45 - 500mA-DC 25W ED1	20 - MGITR2 MTK	3 - 120-277V	1 - Bar hangers standard		
6 202	2 - NIC AT Housing M	63 - 500mA-DC 22W ED8	20 - MGITR2 MTK	1 - 120V	1 - Bar hangers standard		
6 202	2 - NIC AT Housing M	87 - 500mA-DC 20W	20 - MGITR2 MTK	1 - 120V	1 - Bar hangers standard		
6 202	2 - NIC AT Housing M	89 - 500mA-DC 27W ED10	20 - MGITR2 MTK	3 - 120-277V	1 - Bar hangers standard		

Plasterframe for NIC applications


Range	Installation type	Lamp Source	Opening	Voltage		Mounting Option	
				1 - 120V 2 - 277V 3 - 120-277V	0 - No bar hangers 1 - Bar hangers standard		
6 202	01 - NIC Plasterframe S	45 - 500mA-DC 25W ED1	20 - MGITR2 MTK	3 - 120-277V	1 - Bar hangers standard		
6 202	01 - NIC Plasterframe S	63 - 500mA-DC 22W ED8	20 - MGITR2 MTK	1 - 120V	1 - Bar hangers standard		
6 202	01 - NIC Plasterframe S	87 - 500mA-DC 20W	20 - MGITR2 MTK	1 - 120V	1 - Bar hangers standard		
6 202	01 - NIC Plasterframe S	89 - 500mA-DC 27W ED10	20 - MGITR2 MTK	3 - 120-277V	1 - Bar hangers standard		

 **INSTALLATION LUMINAIRE**

Not Supplied

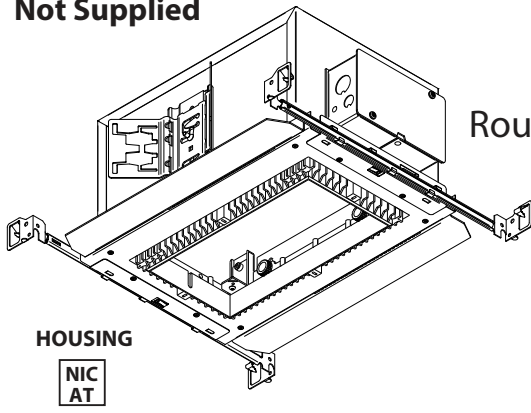

Rough-in Housing or Plasterframe
Required

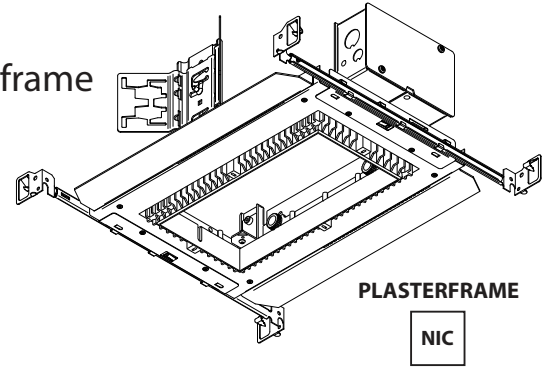

Accessory set

