


LOGIC F1

6 213 47 112◇


◇ = ANO

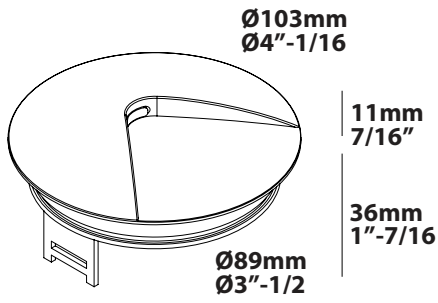

LOGIC F2

6 213 47 122◇

◇ = ANO

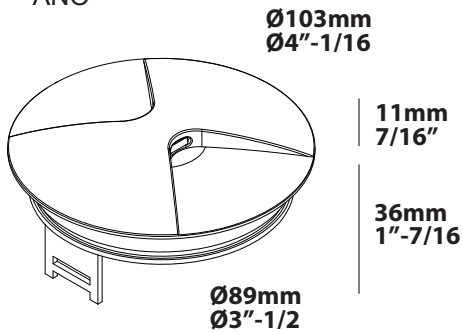

Application

Floor recessed
For indoor & outdoor use

Color Finish

ANO - Alu anodized

Light source

1 x POWERLED WHITE 0,6W
2 x POWERLED WHITE 0,6W

Product description

For 24V-dc class 2 power limited circuits only.
Anti-wicking cable 2x20 AWG included
Suitable for dry, damp or wet locations, floor recessed
Dust-tight - Protected against the effects of temporarily immersion ➔ IP67
Weight: 1323 lbs 0,3kg

Accessories not supplied (required)






213 19 09 GENIE BOX 90 R

Options (not supplied)

6 216 12 00 JUNCTION BOX

 INSTALLATION LUMINAIRE

Accessories

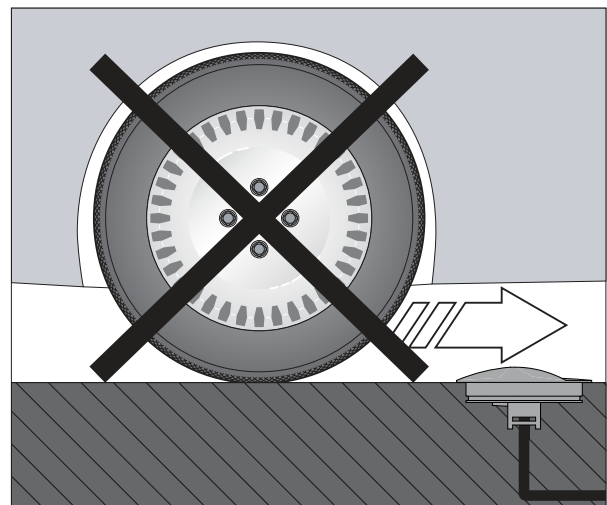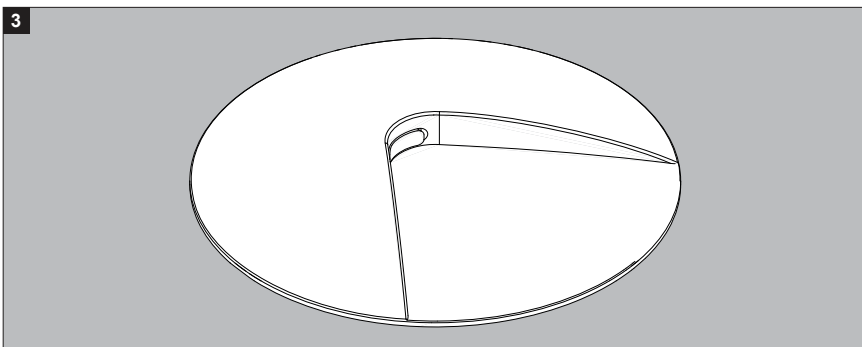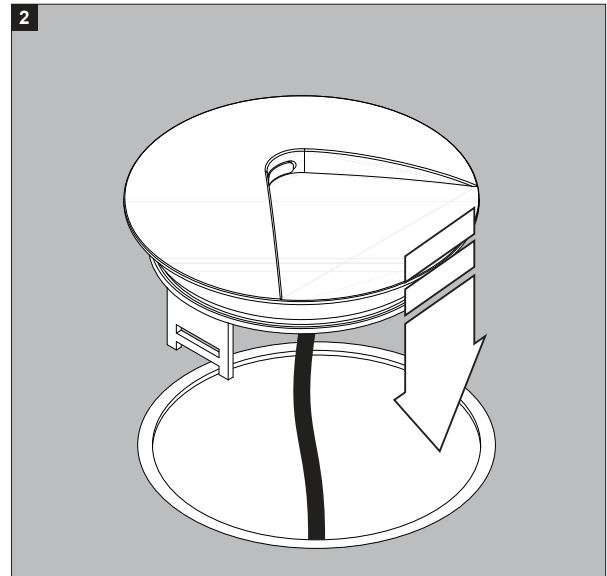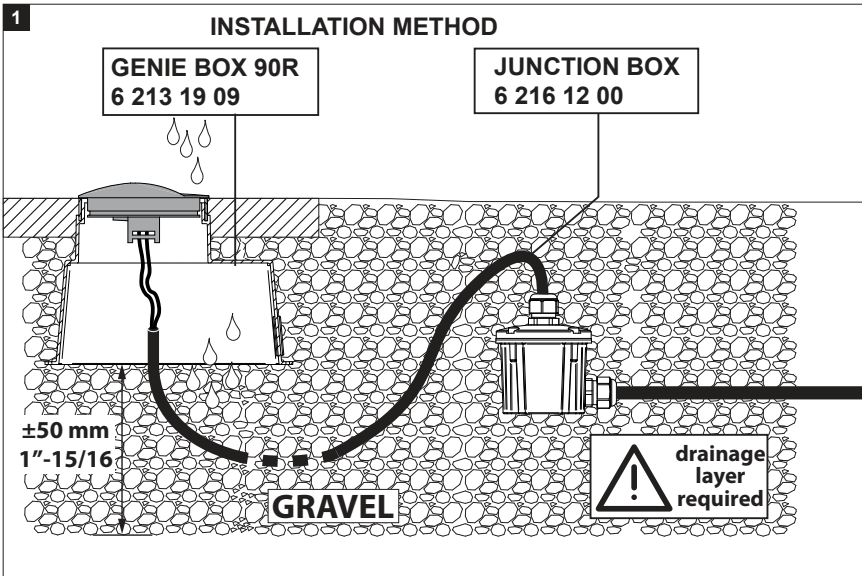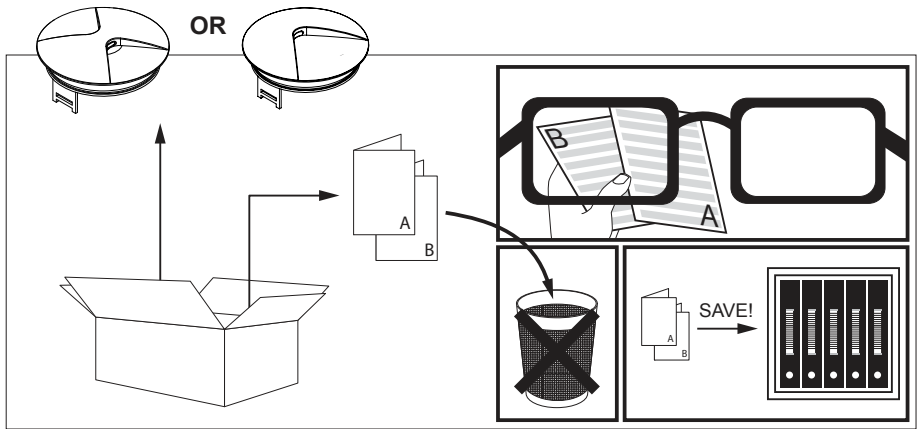

LUMINAIRES MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. CHECK WITH LOCAL AND NATIONAL CODES FOR PROPER INSTALLATION. TO PREVENT ELECTRICAL SHOCK, DISCONNECT ELECTRICAL SUPPLY BEFORE INSTALLATION OR SERVICING

 **WARNING!**

ANY CLAIM TO A WARRANTY SHALL BECOME NULL AND VOID IF THE DEVICE IS NOT INSTALLED WITH THE SUITABLE BOX (OPTIONAL) PROVIDED BY DELTALIGHT N.V.