

LOGIC R1 A 93011◇

6 213 481 811 931◇

◇ = ANO / B

LOGIC R1 A 93030◇

6 213 481 811 932◇

◇ = ANO / B

LOGIC R1 A 93055◇

6 213 481 811 933◇

◇ = ANO / B

LOGIC R1 A 93511◇

6 213 481 811 951◇

◇ = ANO / B

LOGIC R1 A 93530◇

6 213 481 811 952◇

◇ = ANO / B

LOGIC R1 A 93555◇

6 213 481 811 953◇

◇ = ANO / B



Application

Floor recessed
For indoor & outdoor use

Color Finish

ANO - Alu anodized
B - Black anodized

Light source


1 x POWERLED WHITE 7,1W

Product description

Anodised aluminum housing with hardened glass cover
For 24V-DC Current voltage, class 2 power limited circuits only, non dimmable
5' Anti-wicking cable 2x20 AWG included
Suitable for dry, damp or wet locations, floor recessed
Dust-tight - Protected against the effects of temporarily immersion ➡ IP67
Weight: 1,3lbs 0,6kg






Options (not supplied)

6 216 12 00 JUNCTION BOX
6 216 12 02 IP67 CONNECTOR 3P
213 19 09 GENIE BOX 90 R

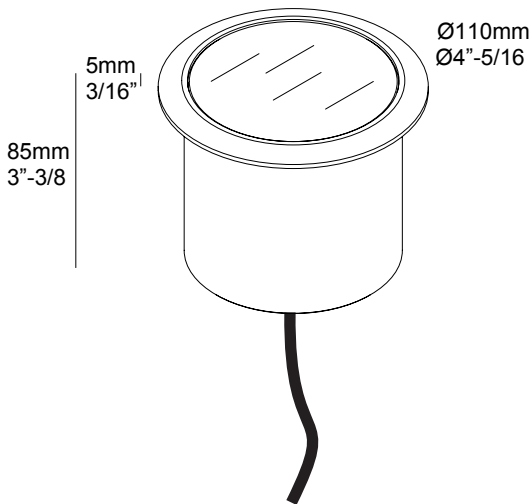

 INSTALLATION LUMINAIRE

Accessories

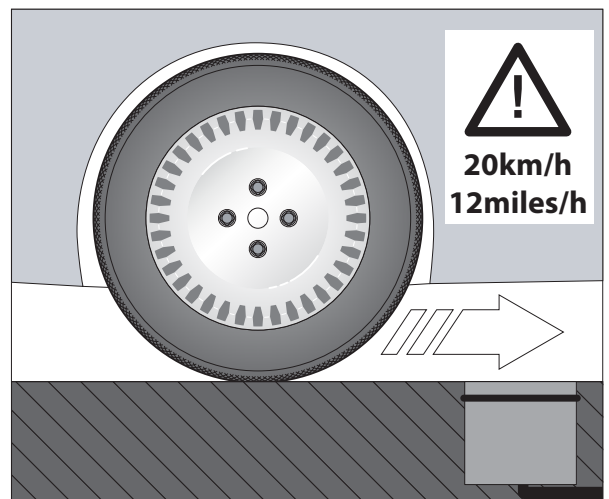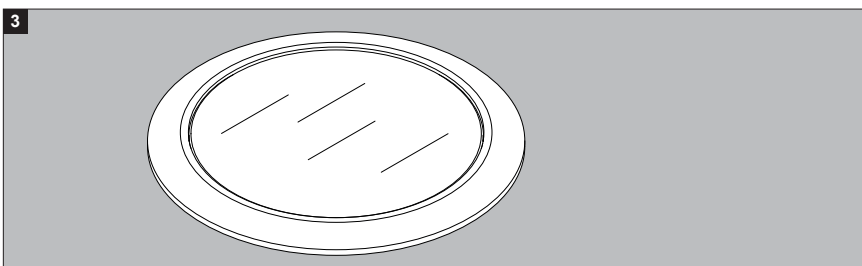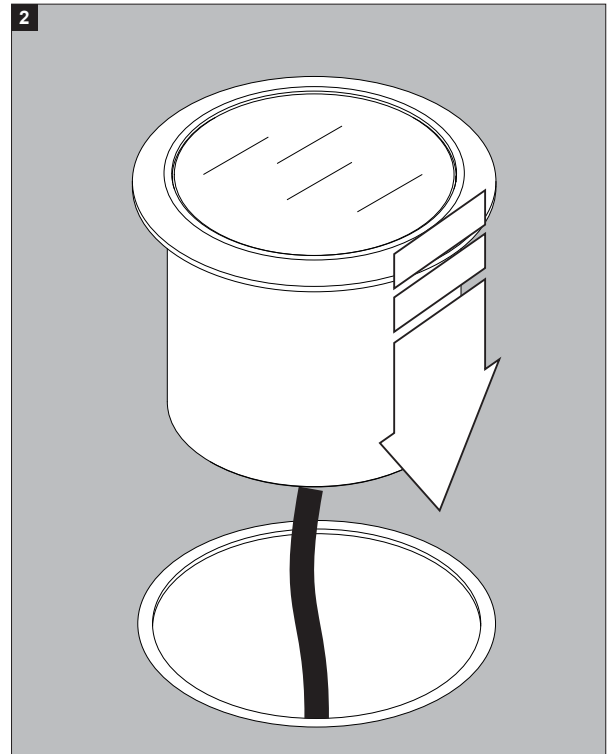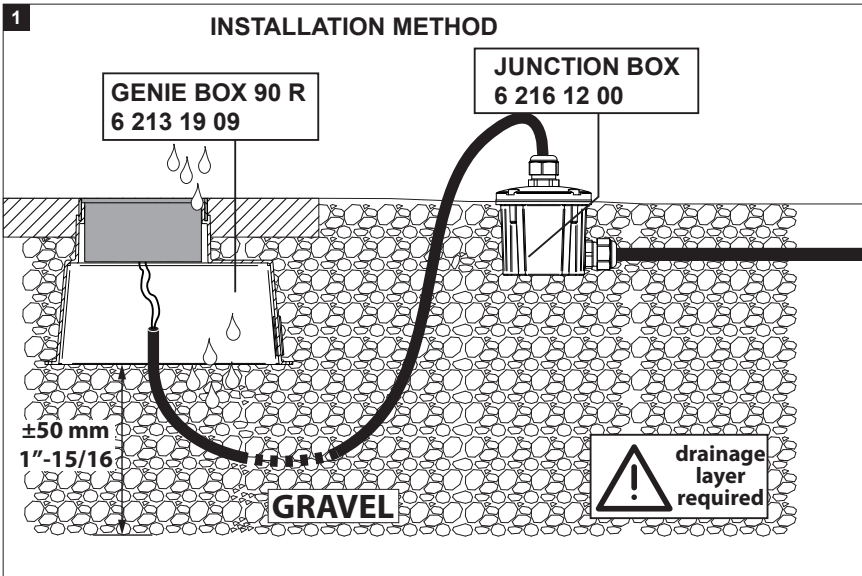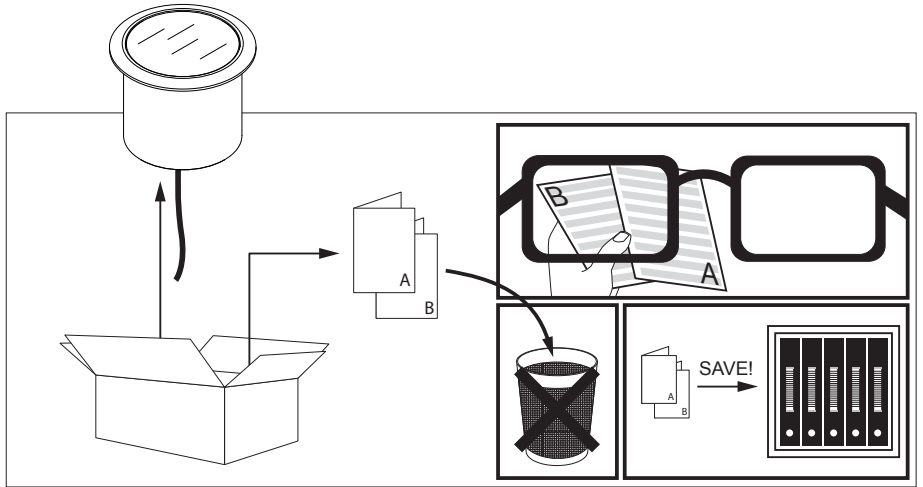

LUMINAIRES MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. CHECK WITH LOCAL AND NATIONAL CODES FOR PROPER INSTALLATION. TO PREVENT ELECTRICAL SHOCK, DISCONNECT ELECTRICAL SUPPLY BEFORE INSTALLATION OR SERVICING

! WARNING

ANY CLAIM TO A WARRANTY SHALL BECOME NULL AND VOID IF THE DEVICE IS NOT INSTALLED WITH THE SUITABLE BOX (OPTIONAL) PROVIDED BY DELTALIGHT N.V.