

MICROSPY IN 92715◇

6 24110 9210◇

◇ = B / W

MICROSPY IN 92730◇

6 24110 9220◇

◇ = B / W

MICROSPY IN 93015◇

6 24110 9310◇

◇ = B / W

MICROSPY IN 93030◇

6 24110 9320◇

◇ = B / W

MICROSPY IN 93515◇


6 24110 9510◇

◇ = B / W

MICROSPY IN 93530◇

6 24110 9520◇

◇ = B / W

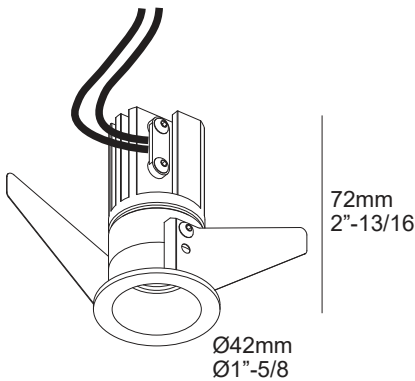

Application

Ceiling recessed

Finishing section to be used with DELTA LIGHT rough-in housing, plasterframe

For indoor use only

Damp Locations

Color Finish

W - White

B - Black

Light source

One 4,1W POWERLED WHITE module included

Power Supply

Remote current controled class 2 power supply required. (Not supplied)

Max 350mA, typical forward voltage 11,8V.

Do not interconnect in parallel!

Specification features

Powder coated aluminum assembly

Pre-installed springs for easy installation

Suitable for damp locations

Dimensions

Height: 72mm = 2"-13/16

Width: Ø42mm = Ø1"-5/8

Ceiling Cut out: Ø36,5mm = Ø1"-7/16

Required options

New construction


Housing for IC and/or airtight applications

Range	Installation type	Lamp Source	Opening	Voltage		Mounting Option	
				1 - 120V	2 - 277V	0 - No bar hangers	1 - Bar hangers standard
6	202	7 - IC AT Housing S	00 -	107 - Plate R36	0 -	1 - Bar hangers standard	

INSTALLATION LUMINAIRE








Rough-in Housing Required

A:8"-5/8 x B:14"-3/16 x C:4"-3/4

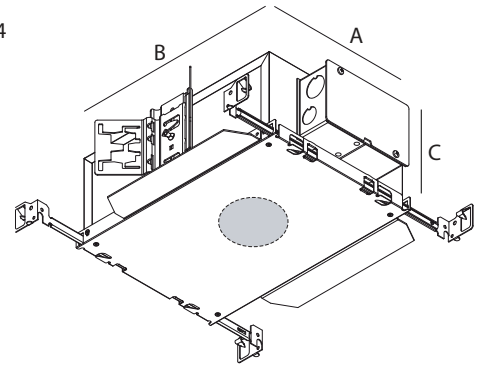

INSTALLATION LUMINAIRE

Accessories

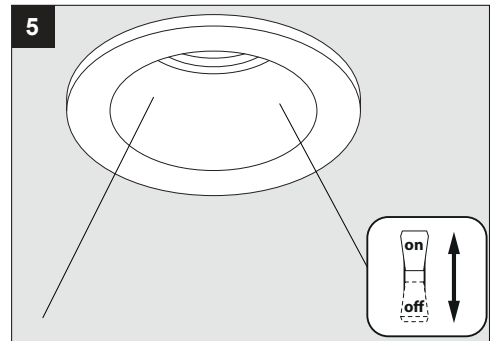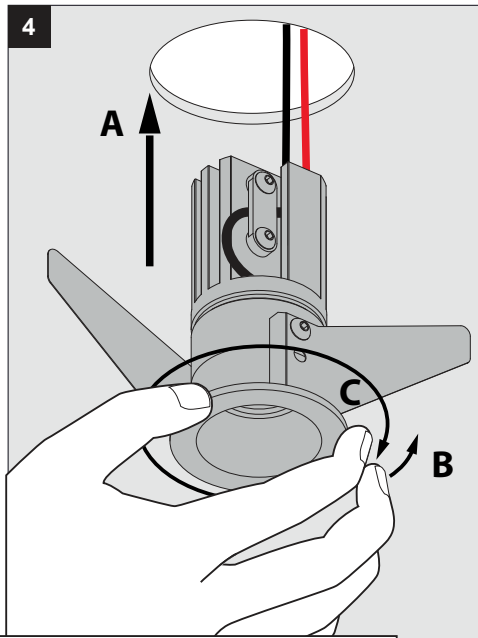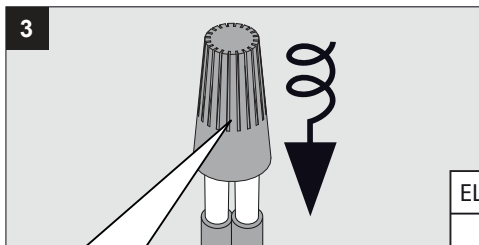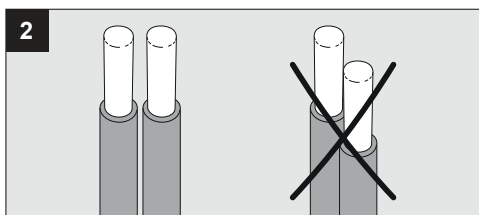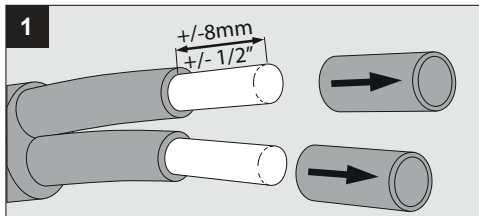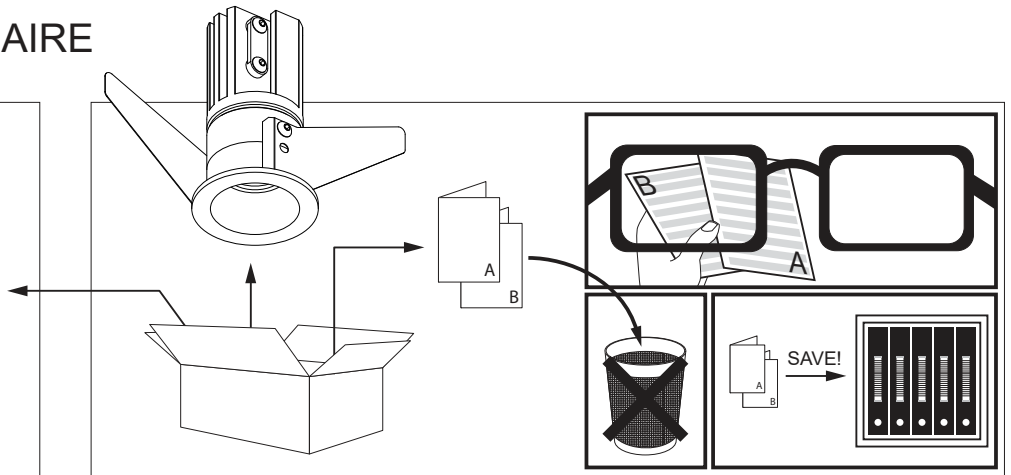

De verlichtingsbron van dit verlichtingstoestel zal enkel door de fabrikant of door de fabrikant aangestelde installateur vervangen worden.

La source lumière de cet appareil ne sera remplacée que par l'entreprise ou par un agent reconnu.

Das enthaltene Leuchtmittel sollte nur durch entsprechendes Fachpersonal ersetzt werden.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent.

La fuente de iluminación que tiene esta luminaria sólo puede remplazarse por el fabricante o por un instalador autorizado.

La sorgente luminosa incorporata in questo apparecchio può essere sostituita solo dal produttore, da un suo centro assistenza oppure da una persona in possesso della necessaria abilitazione.

ELECTRICAL CONNECTION ⚠

