

SUPER-OH! 120 83020

6 308 122 06 832◇

◇ = B

SUPER-OH! 120 82720

6 308 122 06 822◇

◇ = B



Application

Ceiling surface mounted pendant luminaire
Installation to a standard j-box with optional coverplate
For indoor use only

Color Finish

B - BLACK

Light source

6 x POWERLED WHITE 6W

Product description


Powder coated aluminum assembly
EXCL. 500mA-DC Power supply 35,7V typical voltage for each circuit.
Class 2 circuits only, current controlled.
2 circuits
1x Cable 4x18 AWG 9' long
3x Suspension cable 9' long
6x Lens FL-20°
Suitable for damp locations
Protected against solid objects greater than 12mm ➔ IP20
Weight: 19,6lbs 8,9kg

Dimensions




Height: 70mm / 2"-3/4
Diameter: 1200mm / 47"-1/4

Options (not supplied)

6 204 00 104 Coverplate R 104
6 204 99 103 Coverplate S 103


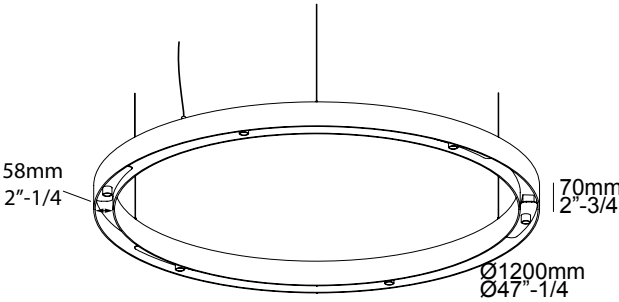


INSTALLATION LUMINAIRE

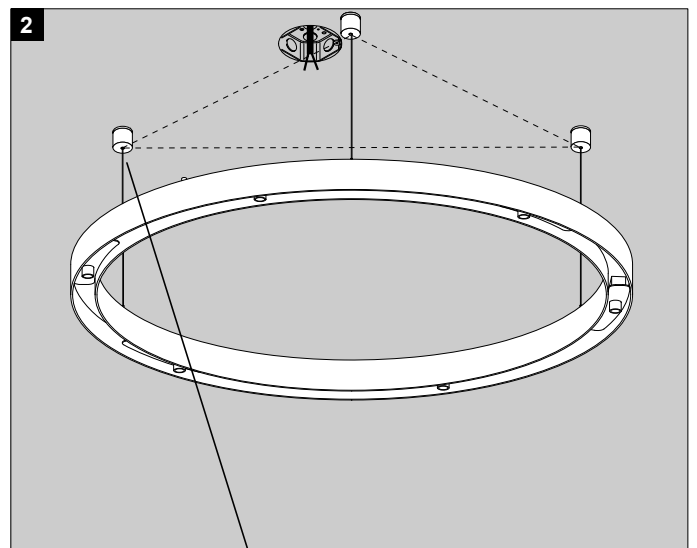
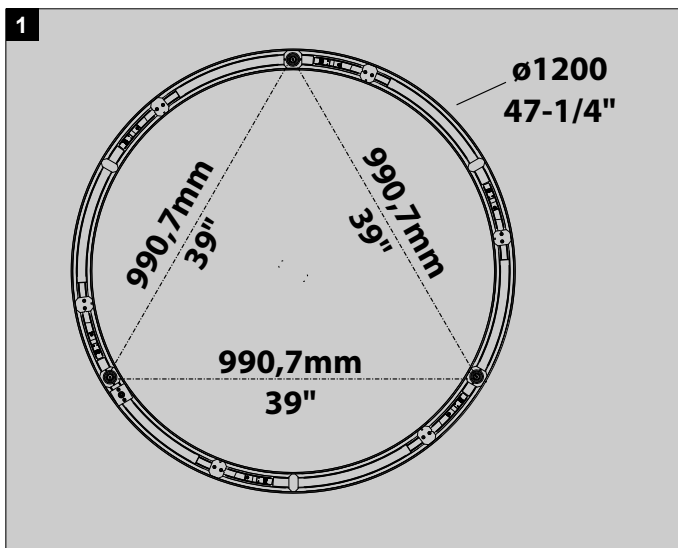
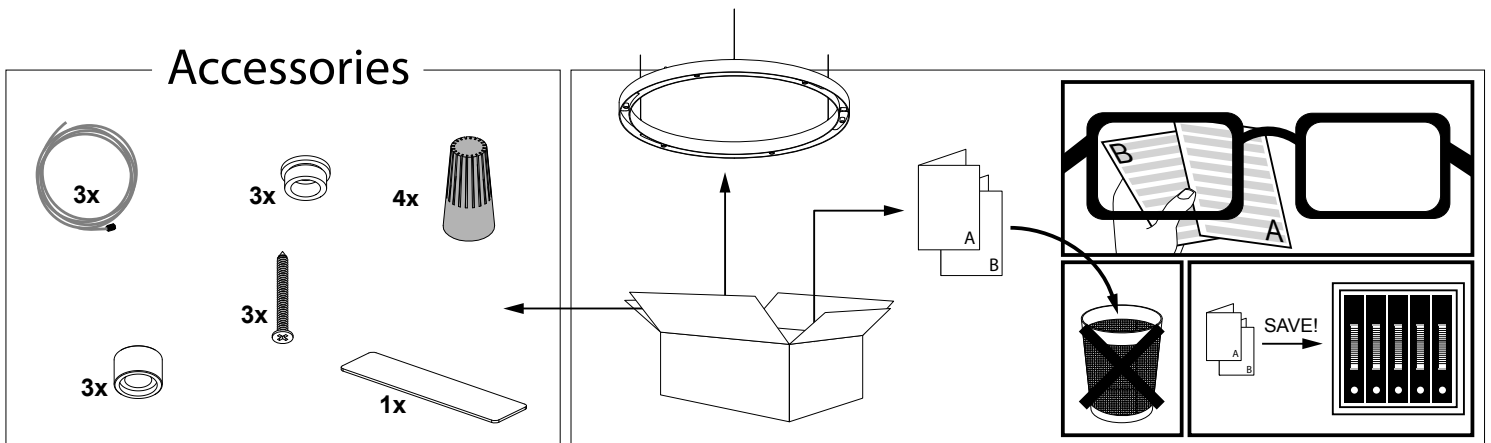


WARNING

EACH SUSPENSION ATTACHMENT MUST BE ABLE TO SUPPORT 44lbs (20Kg) MINIMUM


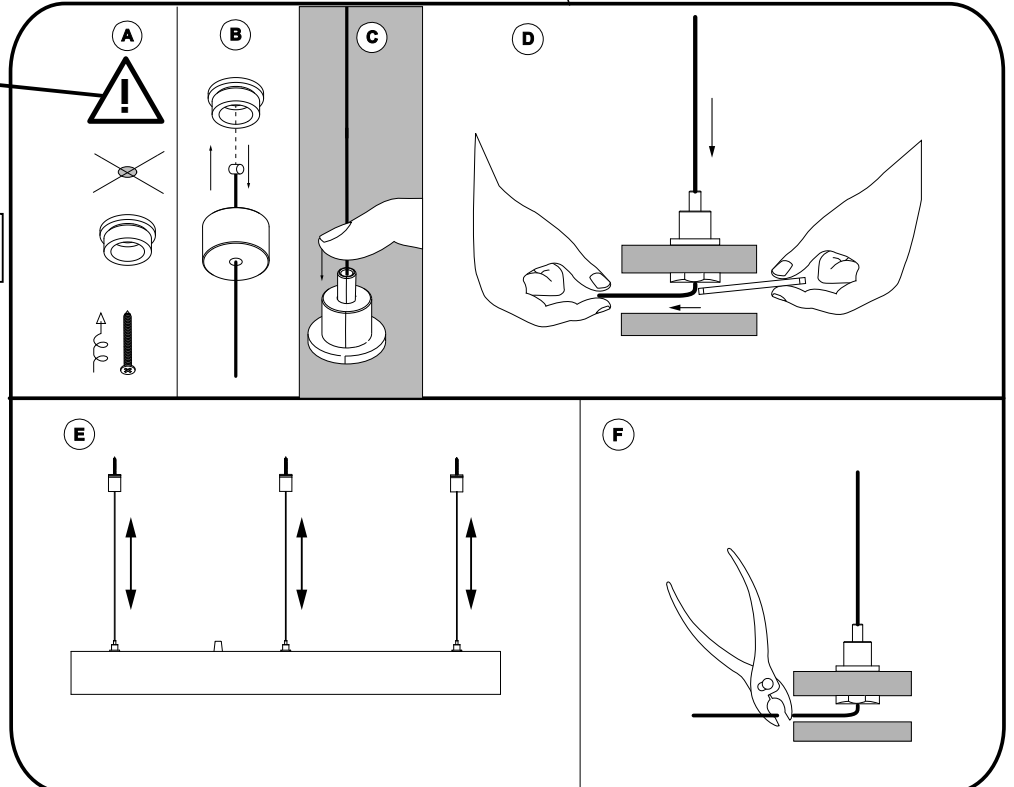
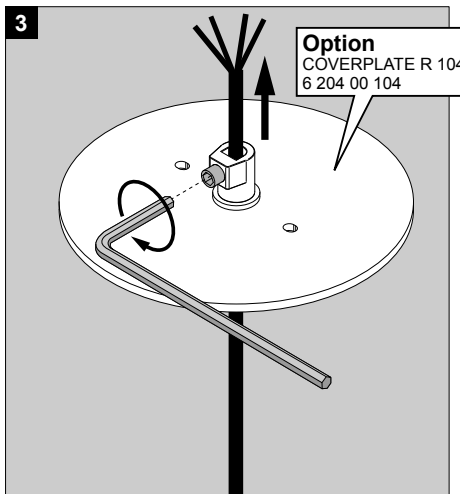



 **INSTALLATION LUMINAIRE**

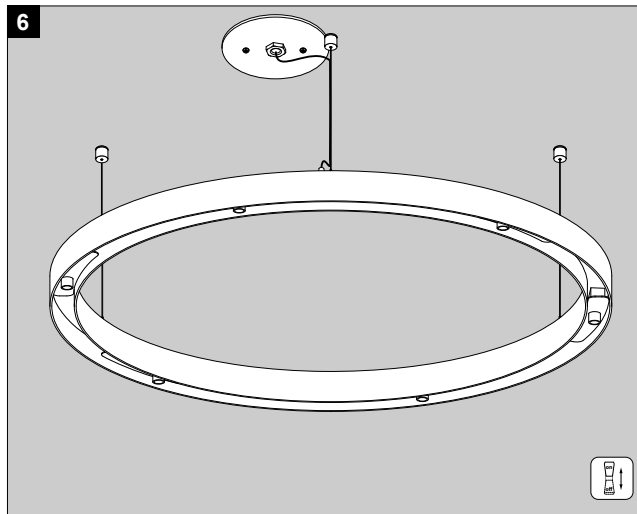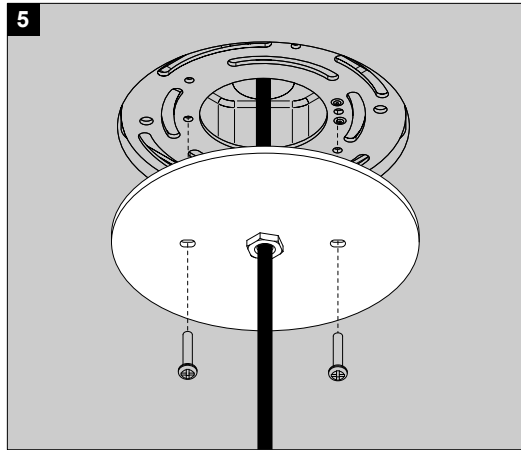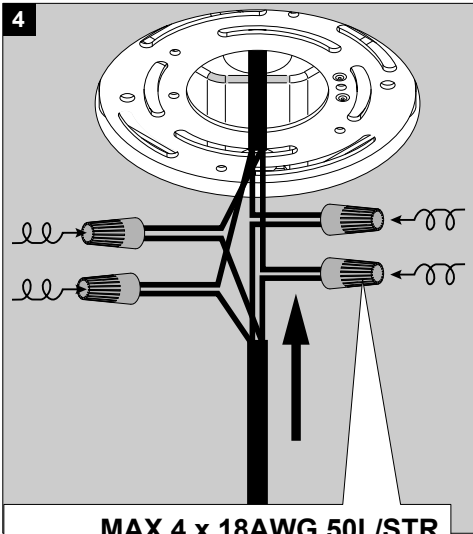



MAX 4 x 18AWG 50L/STR


RENUMBERING AFTER

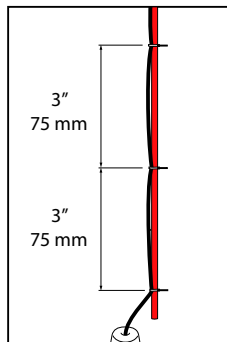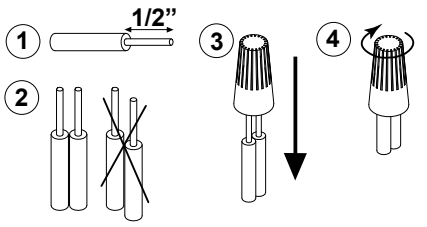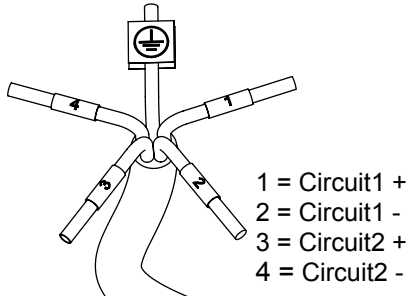









WARNING!
The weight of the luminaire must be suspended by the steel cables, not by the power cord.

ATTENTION!
Le poids du luminaire doit être suspendu par les cables en acier, le cable électrique ne peut pas suspendre le luminaire.