




CRI > 90	BOXY R C
3500 K	LED 10.4W / 1109lm / 500mA
REFL FL 33°	6 251 75 811 952 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
3000 K	LED 10.4W / 1075lm / 500mA
REFL FL 33°	6 251 75 811 932 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
2700 K	LED 10.4W / 1032lm / 500mA
REFL FL 33°	6 251 75 811 922 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W

MAINS DIMMING (FE)
INCL. 1 x CABLE 3 x 18 AWG
INCL. 1 x CABLE SUSP. SINGLE AUTO 5'
120V / 60Hz

2.0 IP20 DAMP

ACCESSORIES
BOXY HONEYCOMB / LENS / GLASS

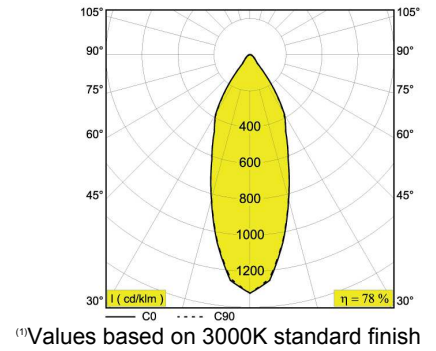

Application

Ceiling surface suspended
Installation to a standard 4" octagonal junction box
For indoor use only

Color Finish

B-B - Black-Black
W-W - White-White
B-MMAT - Black-Gold mat
W-B - White-Black

Light Source

One 10,4W LED included

Delivered Lumens

808lm at 2700K⁽¹⁾
841lm at 3000K⁽¹⁾
868lm at 3500K⁽¹⁾

Power Supply

Electronic power supply included.
120V input, 500mA current controlled
Mains dimmable electronic power supply included
(100-10% dimmable)

Specification features

Surface treated aluminum housing
Suitable for dry or damp locations
Protected against solid objects greater than 12mm | 1/2" → IP20
Weight: 1,3lbs 0,6kg

Dimensions

Height: 118mm = 4"-5/8
Diameter: Ø90mm = 3"-9/16

PROJECT INFO

Date _____

Client _____

Project Name _____

Type/Quantity _____

