




CRI > 90	BOXY XL R C
3500 K	LED 16.8W / 2474lm / 500mA
REFL FL 20°	6 251 73 21 951 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
	6 251 73 21 953 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
REFL FL 37°	6 251 73 21 931 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
	6 251 73 21 933 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
3000 K	LED 16.8W / 2404lm / 500mA
REFL FL 20°	6 251 73 21 921 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
	6 251 73 21 923 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
REFL FL 37°	6 251 73 21 911 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
	6 251 73 21 913 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
2700 K	LED 16.8W / 2308lm / 500mA
REFL FL 20°	6 251 73 21 901 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
	6 251 73 21 903 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
REFL FL 37°	6 251 73 21 881 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
	6 251 73 21 883 ED8 ◇ ◇ = B-B / B-MMAT / W-B / W-W
MAINS DIMMING (FE) INCL.1 x CABLE 3 x 18 AWG INCL.1 x CABLE SUSP. SINGLE AUTO 5' 120V / 60Hz 4.0 IP20 DAMP ACCESSORIES LENS / GLASS	

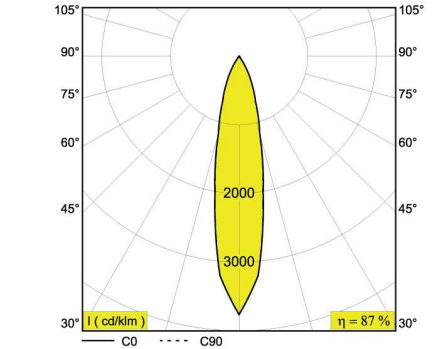

⁽¹⁾Values based on 3000K standard finish

Application
 Ceiling surface mounted
 Installation to a standard octagonal box 4" with optional coverplate installation,
 For indoor use only

Color Finish
 B-B - Black-Black
 W-W - White-White
 B-MMAT - Black-Gold Mat
 W-B - White-Black

Light Source
 One 16,8W LED included

Delivered Lumens with beam angle 20°
 1672lm at 2700K⁽¹⁾
 1735lm at 3000K⁽¹⁾
 1799lm at 3500K⁽¹⁾

with beam angle 37°
 1714lm at 2700K⁽¹⁾
 1778lm at 3000K⁽¹⁾
 1843lm at 3500K⁽¹⁾

Power Supply
 Electronic power supply included.
 120V input, 500mA current controlled
 Mains dimmable electronic power supplies included
 (100-10% dimmable)

Specification features
 Surface treated aluminum housing
 Suitable for dry or damp locations
 Protected against solid objects greater than 12mm | 1/2" → IP20
 Weight: 1,3lbs 0,6kg

Dimensions
 Height: 143mm = 5"-5/8
 Diameter: Ø131mm = 5"-3/16

PROJECT INFO

Date _____

Client _____

Project Name _____

Type/Quantity _____

