




|                    |  |
|--------------------|--|
| <b>CRI &gt; 90</b> | <b>BOXY XL R</b>   |
| <b>3500 K</b>      | LED 24.3W / 2852lm / 700mA                                   |
| <b>REFL FL 20°</b> | <b>6 251 71 21 951 ED1</b> ◇<br>◇ = B-B / B-MMAT / W-B / W-W |
| <b>REFL FL 37°</b> | <b>6 251 71 21 953 ED1</b> ◇<br>◇ = B-B / B-MMAT / W-B / W-W |
| <b>3000 K</b>      | LED 24.3W / 2752lm / 700mA                                   |
| <b>REFL FL 20°</b> | <b>6 251 71 21 931 ED1</b> ◇<br>◇ = B-B / B-MMAT / W-B / W-W |
| <b>REFL FL 37°</b> | <b>6 251 71 21 933 ED1</b> ◇<br>◇ = B-B / B-MMAT / W-B / W-W |
| <b>2700 K</b>      | LED 24.3W / 2653lm / 700mA                                   |
| <b>REFL FL 20°</b> | <b>6 251 71 21 921 ED1</b> ◇<br>◇ = B-B / B-MMAT / W-B / W-W |
| <b>REFL FL 37°</b> | <b>6 251 71 21 923 ED1</b> ◇<br>◇ = B-B / B-MMAT / W-B / W-W |

1-10V DIMMING  
120-277V / 60Hz  
Also usable for MAINS DIMMING (FE)  
120V/60Hz

**3.3** IP20 DAMP

ACCESSORIES  
LENS / GLASS

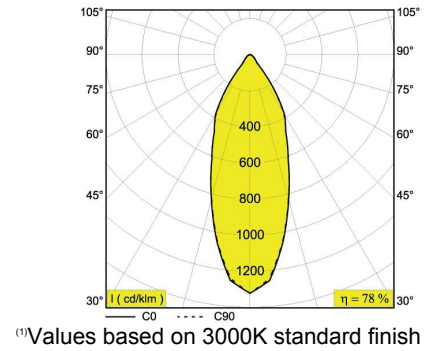

**Application**

Ceiling surface mounted  
Installation to a standard octagonal box 4" with optional coverplate installation,  
For indoor use only

**Color Finish**

B-B - Black-Black  
W-W - White-White  
B-MMAT - Black-Gold Mat  
W-B - White-Black

**Light Source**

One 24,3W LED included

**Delivered Lumens with beam angle 20°**

2307lm at 2700K<sup>(1)</sup>  
2393lm at 3000K<sup>(1)</sup>  
2480lm at 3500K<sup>(1)</sup>

**with beam angle 37°**

2364lm at 2700K<sup>(1)</sup>  
2453lm at 3000K<sup>(1)</sup>  
2542lm at 3500K<sup>(1)</sup>

**Power Supply**

Electronic power supply included.  
120-277V input, 700mA current controlled  
1-10V dimmable electronic power supplies included  
(100-1% dimmable)  
Also usable for MAINS DIMMING @ 120V/60Hz(100-10% dimmable)

**Specification features**

Surface treated aluminum housing  
Suitable for dry or damp locations  
Protected against solid objects greater than 12mm | 1/2" ➔ IP20  
Weight: 1,3lbs 0,6kg

**Dimensions**

Height: 137mm = 5"-3/8  
Diameter: Ø131mm = 5"-3/16

**PROJECT INFO**

Date \_\_\_\_\_

Client \_\_\_\_\_

Project Name \_\_\_\_\_

Type/Quantity \_\_\_\_\_

