



CRI > 90 **BOXY XL S**

**3500 K** LED 24.3W / 2852lm / 700mA

**REFL FL 20°** **6 251 72 21 951 ED1** ◇  
◇ = B-B / B-MMAT / W-B / W-W

**REFL FL 37°** **6 251 72 21 953 ED1** ◇  
◇ = B-B / B-MMAT / W-B / W-W

**3000 K** LED 24.3W / 2752lm / 700mA

**REFL FL 20°** **6 251 72 21 931 ED1** ◇  
◇ = B-B / B-MMAT / W-B / W-W

**REFL FL 37°** **6 251 72 21 933 ED1** ◇  
◇ = B-B / B-MMAT / W-B / W-W

**2700 K** LED 24.3W / 2653lm / 700mA


**REFL FL 20°** **6 251 72 21 921 ED1** ◇  
◇ = B-B / B-MMAT / W-B / W-W

**REFL FL 37°** **6 251 72 21 923 ED1** ◇  
◇ = B-B / B-MMAT / W-B / W-W

1-10V DIMMING  
120-277V / 60Hz  
Also usable for MAINS DIMMING (FE)  
120V/60Hz

**3.5** IP20 DAMP

ACCESSORIES  
LENS / GLASS

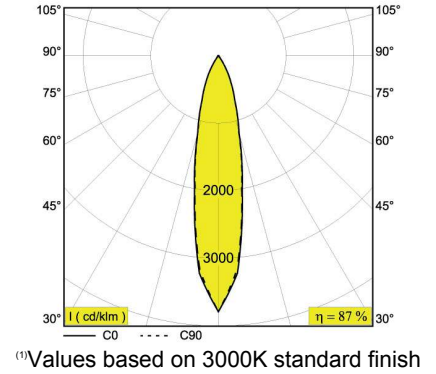

**Application**

Ceiling surface mounted  
Installation to a standard octagonal box 4" with optional coverplate installation,  
For indoor use only

**Color Finish**

B-B - Black-Black  
W-W - White-White  
B-MMAT - Black-Gold mat  
W-B - White-Black

**Light Source**

One 24,3W LED included

**Delivered Lumens with beam angle 20°**

2317m at 2700K<sup>(1)</sup>  
2403lm at 3000K<sup>(1)</sup>  
2491lm at 3500K<sup>(1)</sup>

**with beam angle 37°**

2442lm at 2700K<sup>(1)</sup>  
2533lm at 3000K<sup>(1)</sup>  
2626lm at 3500K<sup>(1)</sup>

**Power Supply**

Electronic power supply included.  
120-277 V input, 700mA current controlled  
1-10V dimmable electronic power supplies included (100-1% dimmable)  
Also usable for MAINS DIMMING @ 120V/60Hz(100-10% dimmable)

**Specification features**

Surface treated aluminum housing  
Suitable for dry or damp locations  
Protected against solid objects greater than 12mm | 1/2" ➔ IP20  
Weight: 1,3lbs 0,6kg

**Dimensions**

Height: 112mm = 4"-7/16  
Length: 124mm = 4"-7/8  
Width: 124mm = 4"-7/8

**PROJECT INFO**

Date \_\_\_\_\_

Client \_\_\_\_\_

Project Name \_\_\_\_\_

Type/Quantity \_\_\_\_\_

