

CRI > 80

**MIDISPY TRIMLESS**

**3500 K** LED [C] 4.1W / 425lm / 350mA

**LENS FL 20°** **6 414 222 852** ◇  
◇ = B / W

**3000 K** LED [C] 4.1W / 425lm / 350mA

**LENS FL 20°** **6 414 222 832** ◇  
◇ = B / W

**2700 K** LED [C] 4.1W / 425lm / 350mA

**LENS FL 20°** **6 414 222 822** ◇  
◇ = B / W

ADJUSTABLE 0-90° / 355°


0.3 IP20 DAMP

**REQUIREMENTS**

ROUGH-IN

LED POWER SUPPLY 350mA (REMOTE)

MIDISPY TUBE ▶ 414 03 00 B/W/MMAT/SG/FG/FBR

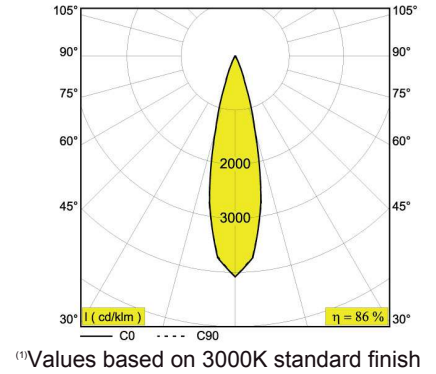

**Application**

Finishing section to be used with DELTA LIGHT ROUGH-IN  
Mounting kit Midispy Trimless included in rough-in  
For indoor use only

**Color Finish**

B - Black  
W - White

**Color Finish (Accessories)**

B - Black  
FBR - Flemish Bronze  
FG- Flemish Gold  
MMAT - Gold Mat  
SG - Silver Grey  
W - White

**Light Source**

One Max. 4.1W LED included

**Delivered Lumens**

3500K<sup>(1)</sup> - FL-20° - 359lm at 350mA  
3000K<sup>(1)</sup> - FL-20° - 359lm at 350mA  
2700K<sup>(1)</sup> - FL-20° - 359lm at 350mA

**Power Supply**


Remote installation

**Specification features**

Housing fabricated of powder coated steel, powder coated steel trim  
Pre-installed springs for easy installation  
Suitable for dry and damp location  
Weight: 0.3lbs

**Dimensions**

Ceiling Cut out: Ø3-1/4"

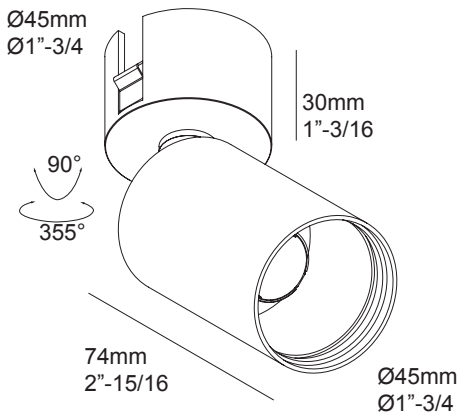






**PROJECT INFO**


Date \_\_\_\_\_

Client \_\_\_\_\_

Project Name \_\_\_\_\_

Type/Quantity \_\_\_\_\_

HOUSING	LED POWER SUPPLY
<p><b>S-SMALL: A:15"-7/16 x B:8"-11/16 x C:5"</b>  <b>A:393mm x B:220mm x C:127mm</b></p>  <p>IC AT </p>	<p><b>MAINS / LUTRON* ECO DIM / NON DIM</b>  <b>A:8" x B:2"-19/32 x C:2"-1/2</b>  <b>A:203mm x B:66mm x C:63mm</b></p>  <p><b>0-10V / LUTRON* 2-WIRE DIM / MULTI</b>  <b>A:8" x B:4"-5/16 x C:2"-1/2</b>  <b>A:203mm x B:109mm x C:63mm</b></p>  <p></p>

 Indicative opening

HOUSING

Code	Description
6 202 700 86 01	IC AT HSG S TRIMLESS 86

LED POWER SUPPLY REMOTE

Code	Description	MIN-MAX
6 300 44 ED1	LED POWER SUPPLY 350mA-DC 19W 0-10V Dim 120-277V Remote	4
6 300 46 ED8	LED POWER SUPPLY 350mA-DC 11W Mains Dim 120V Remote	2
6 300 70 ED12	LED POWER SUPPLY 350mA-DC 13W Hi-Lume 2-Wire <sup>2</sup> 120V Remote	2 - > 3
6 300 41 ED13	LED POWER SUPPLY 350mA-DC 19W Hi-Lume EcoSystem <sup>1</sup> 120-277V Remote	4
6 300 15	LED POWER SUPPLY Multi-Power 15W 120V Remote	3
6 300 14 ED7	LED POWER SUPPLY Multi-Power 15W 0-10V Push Dim 120V Remote	3

<sup>1</sup>DIMMING: Lutron Hi-lume 1% EcoSystem LED driver with Softon, Fade-to-Black dimming technology - PEQ1E

<sup>2</sup>DIMMING: Lutron Hi-lume 1% 2-wire (120V forward phase only) - LTEA2W

CRI > 90

**MIDISPY TRIMLESS**

**3500 K** LED [D] 6.4W / 587lm / 350mA

**REFL WFL 40°** **6 414 221 953** ◇  
◇ = B / W

**3000 K** LED [D] 6.4W / 587lm / 350mA

**REFL WFL 40°** **6 414 221 933** ◇  
◇ = B / W

**2700 K** LED [D] 6.4W / 587lm / 350mA

**REFL WFL 40°** **6 414 221 923** ◇  
◇ = B / W

ADJUSTABLE 0-90° / 355°


**0.3** IP20 DAMP

**REQUIREMENTS**

ROUGH-IN

LED POWER SUPPLY 350mA (REMOTE)

MIDISPY TUBE ▶ 414 03 00 B/W/MMAT/SG/FG/FBR

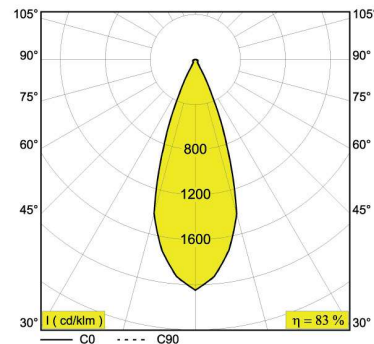

<sup>(1)</sup>Values based on 3000K standard finish

**Application**

Finishing section to be used with DELTA LIGHT rough-in housing or Mounting kit Midispy Trimless included in rough-in. For indoor use only

**Color Finish**

B - Black  
W - White

**Color Finish (Accessories)**

B - Black  
FBR - Flemish Bronze  
FG - Flemish Gold  
MMAT - Gold Mat  
SG - Silver Grey  
W - White

**Light Source**

One Max. 6.4W LED included

**Delivered Lumens**

3500K<sup>(1)</sup> - WFL-40° - 488lm at 350mA  
3500K<sup>(1)</sup> - WFL-40° - 488lm at 350mA  
3500K<sup>(1)</sup> - WFL-40° - 488lm at 350mA

**Power Supply**

Remote installation

**Specification features**

Housing fabricated of powder coated steel, powder coated steel trim  
Pre-installed springs for easy installation  
Suitable for dry and damp location  
Weight: 0.3lbs

**Dimensions**

Ceiling Cut out: Ø3-1/4"


**PROJECT INFO**






Date


Client

Project Name

Type/Quantity

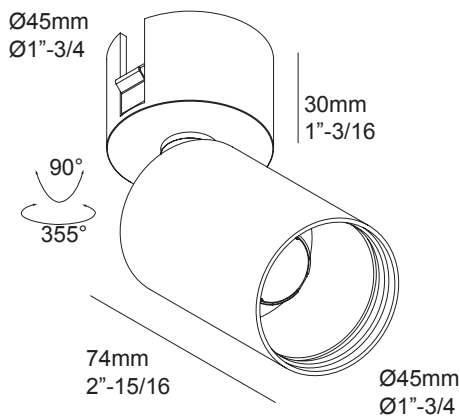

HOUSING	LED POWER SUPPLY
<p><b>S-SMALL: A:15"-7/16 x B:8"-11/16 x C:5"</b>  <b>A:393mm x B:220mm x C:127mm</b></p>  <p>IC AT </p>	<p><b>MAINS / LUTRON* ECO DIM / NON DIM</b>  <b>A:8" x B:2"-19/32 x C:2"-1/2</b>  <b>A:203mm x B:66mm x C:63mm</b></p>  <p><b>0-10V / LUTRON* 2-WIRE DIM / MULTI</b>  <b>A:8" x B:4"-5/16 x C:2"-1/2</b>  <b>A:203mm x B:109mm x C:63mm</b></p>  <p></p>

 Indicative opening

HOUSING

Code	Description
6 202 700 86 01	IC AT HSG S TRIMLESS 86

LED POWER SUPPLY REMOTE

Code	Description	MIN-MAX
6 300 44 ED1	LED POWER SUPPLY 350mA-DC 19W 0-10V Dim 120-277V Remote	2
6 300 46 ED8	LED POWER SUPPLY 350mA-DC 11W Mains Dim 120V Remote	1
6 300 70 ED12	LED POWER SUPPLY 350mA-DC 13W Hi-Lume 2-Wire <sup>2</sup> 120V Remote	1
6 300 41 ED13	LED POWER SUPPLY 350mA-DC 19W Hi-Lume EcoSystem <sup>1</sup> 120-277V Remote	2
6 300 15	LED POWER SUPPLY Multi-Power 15W 120V Remote	2
6 300 14 ED7	LED POWER SUPPLY Multi-Power 15W 0-10V Push Dim 120V Remote	2

<sup>1</sup>DIMMING: Lutron Hi-lume 1% EcoSystem LED driver with Softon, Fade-to-Black dimming technology - PEQ1E

<sup>2</sup>DIMMING: Lutron Hi-lume 1% 2-wire (120V forward phase only) - LTEA2W