

CLASS  
2

CRI > 90 **SUPERLOOP VR 70 SBL**

**3000 K** LED FLEX 20.5W / 2786lm / 500mA  
LED FLEX 30.3W / 3510lm / 700mA

**6 321 407 93** ◇  
◇ = B / W

INCL.1 x ROD SUSPENSION 25"  
INCL.1 x CABLE 3 x 18 AWG

**6.8** IP20 DAMP

FULL INFO TECHNICAL CHAPTER

**OPTIONS**

**CONTROL GEAR**



**LED POWER SUPPLY**  
500mA-DC / 27W / 120V DIM1  
6 300 0451 ED1  
120V / 60Hz IP20 7"-3/16 x 3"-1/8 x 2"-3/4

**LED POWER SUPPLY**  
500mA-DC / 27W / 277V DIM1  
6 300 0452 ED1  
277V / 60Hz IP20 7"-3/16 x 3"-1/8 x 2"-3/4

**LED POWER SUPPLY**  
500mA-DC / 27W / 120V DIM10  
6 300 0891 ED10  
120V / 60Hz IP20 7"-3/16 x 3"-1/8 x 2"-3/4

**LED POWER SUPPLY**  
500mA-DC / 27W / 277V DIM10  
6 300 0892 ED10  
277V / 60Hz IP20 7"-3/16 x 3"-1/8 x 2"-3/4



**LED POWER SUPPLY**  
700mA-DC / 38W / 120V DIM1  
6 300 0531 ED1  
120V / 60Hz IP20 7"-3/16 x 3"-1/8 x 2"-3/4

**LED POWER SUPPLY**  
700mA-DC / 38W / 277V DIM1  
6 300 0532 ED1  
277V / 60Hz IP20 7"-3/16 x 3"-1/8 x 2"-3/4

**LED POWER SUPPLY**  
700mA-DC / 38W / 120V DIM10  
6 300 0841 ED10  
120V / 60Hz IP20 7"-3/16 x 3"-1/8 x 2"-3/4

**LED POWER SUPPLY**  
700mA-DC / 38W / 277V DIM10  
6 300 0842 ED10  
277V / 60Hz IP20 7"-3/16 x 3"-1/8 x 2"-3/4

DIM1: DIMMING BY 1-10V  
DIM10: DIMMING BY LUTRON - HI LUME 1% ECO SYSTEM / 3-WIRE DIMMING

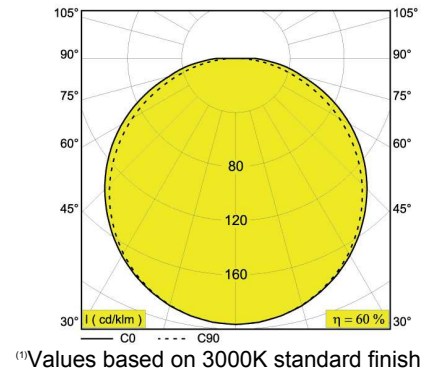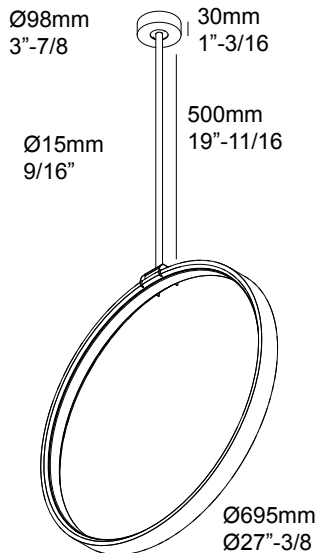

**Application**  
Ceiling surface mounted  
For indoor use only

**Color Finish**  
B - Black  
W - White  
FG - Flemisch Gold  
FB - Flemisch Bronze

**Light Source**  
LED Flex 20,5-30,3W included

**Delivered Lumens**  
2109lm at 3000K<sup>(1)</sup>

**Power Supply**  
Electronic power supply 500-700mA, not included.

**Specification features**  
Surface treated aluminum housing  
Suitable for dry or damp locations  
Protected against solid objects greater than 12mm | 1/2" → IP20  
Weight: 6,8lbs 3,09kg

**Dimensions**  
Height: 50mm = 2"  
Diameter: Ø695mm = 27"-3/8

**PROJECT INFO**

Date \_\_\_\_\_

Client \_\_\_\_\_

Project Name \_\_\_\_\_

Type/Quantity \_\_\_\_\_

CLASS  
2

CRI > 90 SUPERLOOP VR 90 SBL

3000K LED FLEX 28.9W / 3845lm / 700mA  
LED FLEX 38.7W / 4570lm / 900mA

6 321 409 93 ◊  
◊ = B / W

INCL. 1 x ROD SUSPENSION 25"  
INCL. 1 x CABLE 3 x 18 AWG

8.4 IP20 DAMP

FULL INFO TECHNICAL CHAPTER

OPTIONS

CONTROL GEAR



LED POWER SUPPLY 7"-3/16 x 3"-1/8 x 2"-3/4  
700mA-DC / 38W / 120V DIM1  
6 300 0531 ED1  
120V / 60Hz IP20

LED POWER SUPPLY 7"-3/16 x 3"-1/8 x 2"-3/4  
700mA-DC / 38W / 277V DIM1  
6 300 0532 ED1  
277V / 60Hz IP20



LED POWER SUPPLY 7"-3/16 x 3"-1/8 x 2"-3/4  
700mA-DC / 38W / 120V DIM10  
6 300 0841 ED10  
120V / 60Hz IP20

LED POWER SUPPLY 7"-3/16 x 3"-1/8 x 2"-3/4  
700mA-DC / 38W / 277V DIM10  
6 300 0842 ED10  
277V / 60Hz IP20

LED POWER SUPPLY 7"-3/16 x 3"-1/8 x 2"-3/4  
900mA-DC / 44W / 120V DIM1  
6 300 0941 ED1  
120V / 60Hz IP20

LED POWER SUPPLY 7"-3/16 x 3"-1/8 x 2"-3/4  
900mA-DC / 44W / 277V DIM1  
6 300 0942 ED1  
277V / 60Hz IP20

DIM1: DIMMING BY 1-10V  
DIM10: DIMMING BY LUTRON - HI LUME 1% ECO SYSTEM / 3-WIRE DIMMING

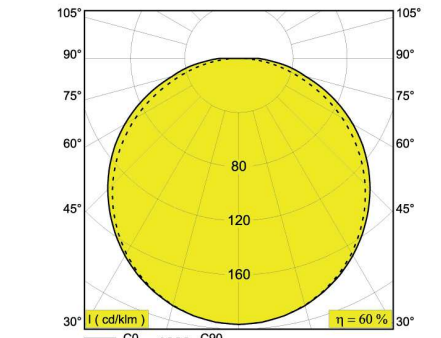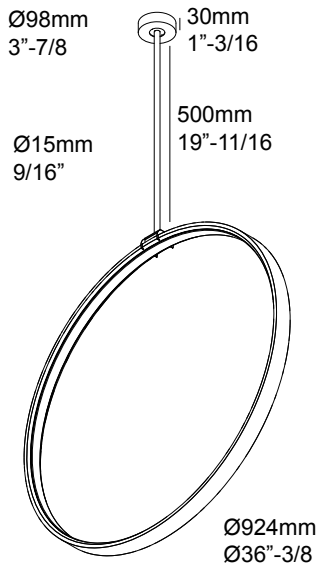

(1) Values based on 3000K standard finish

Application

Ceiling surface mounted  
For indoor use only

Color Finish

B - Black  
W - White  
FG - Flemisch Gold  
FB - Flemisch Bronze

Light Source

LED Flex 28,9-38,7W included

Delivered Lumens

2746lm at 3000K(1)

Power Supply

Electronic power supply 700-900mA, not included.

Specification features

Surface treated aluminum housing  
Suitable for dry or damp locations  
Protected against solid objects greater than 12mm | 1/2" → IP20  
Weight: 8,4lbs 3,81kg

Dimensions

Height: 50mm = 2"  
Diameter: Ø924mm = 36"-3/8

PROJECT INFO

Date \_\_\_\_\_

Client \_\_\_\_\_

Project Name \_\_\_\_\_

Type/Quantity \_\_\_\_\_

CLASS  
2

CRI > 90 SUPERLOOP VR 120 SBL

3000 K LED FLEX 37.2W / 4951lm / 900mA  
LED FLEX 51.9W / 6027lm / 1200mA

6 321 412 93 ◊  
◊ = B / W

INCL. 1 x ROD SUSPENSION 25"  
INCL. 1 x CABLE 3 x 18 AWG

10.3 IP20 DAMP

FULL INFO TECHNICAL CHAPTER

OPTIONS



CONTROL GEAR



LED POWER SUPPLY 7"-3/16 x 3"-1/8 x 2"-3/4  
900mA-DC / 44W / 120V DIM1  
6 300 0941 ED1  
120V / 60Hz IP20

LED POWER SUPPLY 7"-3/16 x 3"-1/8 x 2"-3/4  
900mA-DC / 44W / 277V DIM1  
6 300 0942 ED1  
277V / 60Hz IP20

DIM1: DIMMING BY 1-10V

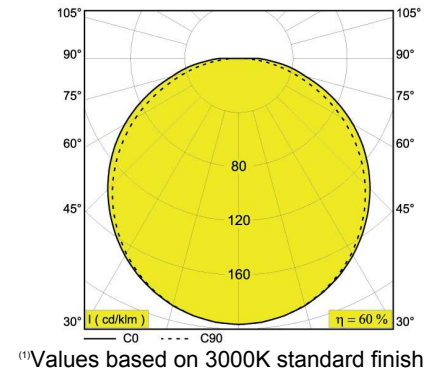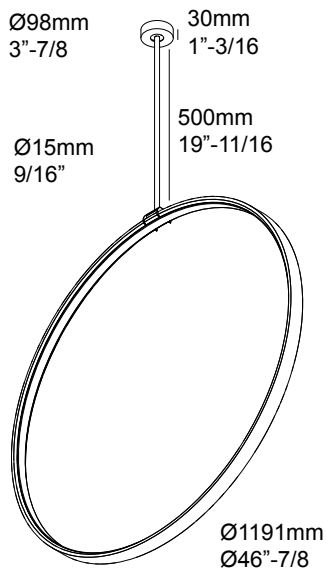

**Application**  
Ceiling surface mounted  
For indoor use only

**Color Finish**  
B - Black  
W - White  
FG - Flemisch Gold  
FB - Flemisch Bronze

**Light Source**  
LED Flex 37,2 - 51,9W included

**Delivered Lumens**  
3622lm at 3000K<sup>(1)</sup>

**Power Supply**  
Electronic power supply 900-12mA, not included.

**Specification features**  
Surface treated aluminum housing  
Suitable for dry or damp locations  
Protected against solid objects greater than 12mm | 1/2" → IP20  
Weight: 10,4lbs 4,72kg

**Dimensions**  
Height: 50mm = 2"  
Diameter: Ø1191mm = 46"-7/8

PROJECT INFO

Date \_\_\_\_\_

Client \_\_\_\_\_

Project Name \_\_\_\_\_

Type/Quantity \_\_\_\_\_