

BORDERLINE


The Borderline enables you to frame the room with light using LED, creating a contemporary and atmospheric look and feel. This profile can be used for both wall and ceiling application, and features a remarkable but easy-to-install trimless finish. An indirect lighting solution with exceptional architectural detail.

www.deltalight.us/borderline
www.deltalight.ca/borderline



1

PROFILE CONSTRUCTION

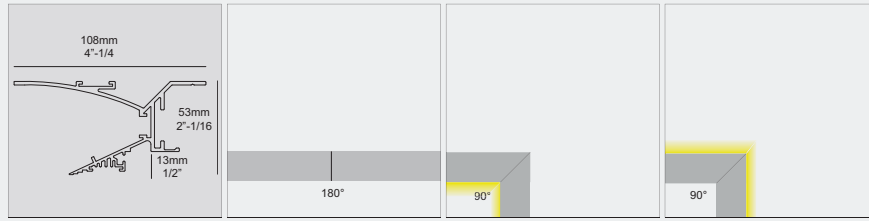


BL - PROFILE	BL - CORNER 180°	BL - CORNER 90° INT	BL - CORNER 90° EXT
6 371 00 00 ◊	371 06 01	371 06 06	371 06 16

◊ W	0.7	0.7	0.7
MAX.L / PROFILE: 19' 8"-1/4			
NIC 3.1 / 3'			

2

PROFILE FIXATION

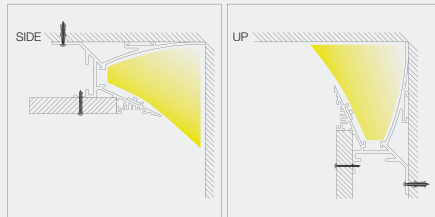

PRO

3

PROFILE CONNECTION

4

LIGHT MODULES



LED FLEX IN & OUT

SUITABLE FOR
LED FLEX IN & OUT
PAG PRO 664

SUITABLE FOR ALL PROFILES FROM PAGE PRO 746-749 & PRO 768-819
 NO LEDFLEX OUT FOR: DOT.COM WALLWASH TR

LEDFLEX



5m / 16'-3/8"- 24V-DC MOUNTED

0.7

WHITE

NEW TW

NEW RGB

24V-DC / ^{Class 2}						
		Dividable per 100mm / 4" 70 smd LED/m	Dividable per 50mm / 2" 140 smd LED/m	Dividable per 33,3mm / 1"-1/4 180 smd LED/m	Dividable per 100mm / 4" 60 smd LED/m	
		5,1W/3' 650lm/3'	15,1W/3' 1400lm/3'	21,6W/3' 2100lm/3'	14,4W/3' 1350lm/3'	
		LEDFLEX	LEDFLEX FP	LEDFLEX HP*	LEDFLEX TW	LEDFLEX RGB
CRI > 90						
4000K						
DAMP	IN	300 91 52 94	300 91 53 94	600 91 54 94		
WET	OUT (IP65)	300 91 62 94	300 91 63 94			
3500K						
DAMP	IN	300 91 52 95	300 91 53 95	300 91 54 95		
WET	OUT (IP65)	300 91 62 95	300 91 63 95			
3000K						
DAMP	IN	300 91 52 93	300 91 53 93	300 91 54 93		
WET	OUT (IP65)	300 91 62 93	300 91 63 93			
2700K						
DAMP	IN	300 91 52 92	300 91 53 92	300 91 54 92		
WET	OUT (IP65)	300 91 62 92	300 91 63 92			
2700K > 5700K						
DAMP	IN			21031 0010		
WET	OUT (IP65)					
RGB						
DAMP	IN				300 91 53 33	
WET	OUT (IP65)				300 91 63 33	


LED POWER SUPPLY / INFO PAG TEC

24V-DC / 96W DIM1 6 300 89 24 96 ED1	max.61'-11/16 (max.9' / Powerline)	max.20'-11/16 (max.9' / Powerline)	max.14'-7/16 (max.9' / Powerline)	max.21'-27/32 (max.9' / Powerline)	max.21'-11/16 (max.9' / Powerline)
24V-DC / 96W DIM8 6 300 89 24 96 ED8	max.61'-11/16 (max.9' / Powerline)	max.20'-11/16 (max.9' / Powerline)	max.14'-7/16 (max.9' / Powerline)	max.21'-27/32 (max.9' / Powerline)	max.21'-11/16 (max.9' / Powerline)

RGB DRIVER / INFO PAG TEC

12/24V-DC 72/96W 6 300 90 301				*use in combination with Led Power Supply 24V-DC	*use in combination with Led Power Supply 24V-DC
---	--	--	--	--	--

LEDFLEX HP
 ONLY IN FREE STANDING PROFILES



DIM1: dimming by 0-10V
DIM8: mains dimmable
 *±/- 5%