

MICROLINE 60


These Microline profiles can be used either for recessed, surface mounted or suspended applications. The narrow lines of light enable you to create appealing lighting scenario's. Microline 40+ can be used to enhance the sense of space in a room thanks to its protruding optics, which delivers a small amount of indirect light onto the ceiling.

www.deltalight.us/microline60
www.deltalight.ca/microline60



1

PROFILE CONSTRUCTION

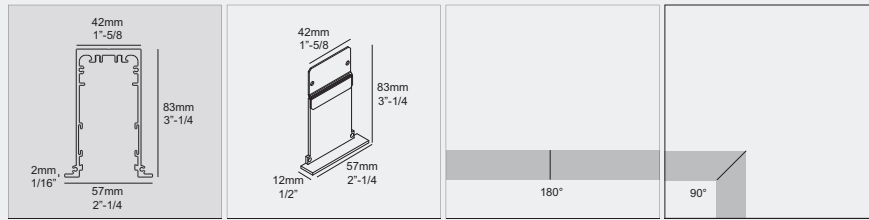


MIC60 - PROFILE	MIC60 - END CAP	MIC - CORNER 180°	MIC - CORNER 90°
6 399 03 00 ◊	399 03 03 01 ◊	399 06 01	399 06 06

◊ ANO / W	◊ ANO / W	0.7	0.7
MAX.L / PROFILE: 19' 8"-1/4	0.2		
3.3 / 3'			

PRO

2

PROFILE FIXATION



MIC60 - INSIDE CLIP
399 03 14 01
2" x (L + 3/8") x 4"-3/4
max.1"
0.2

3

PROFILE CONNECTION

4

LIGHT MODULES
SEE PAGE PRO 674


MICROLINE 40

www.deltalight.us/microline40
www.deltalight.ca/microline40



1

PROFILE CONSTRUCTION

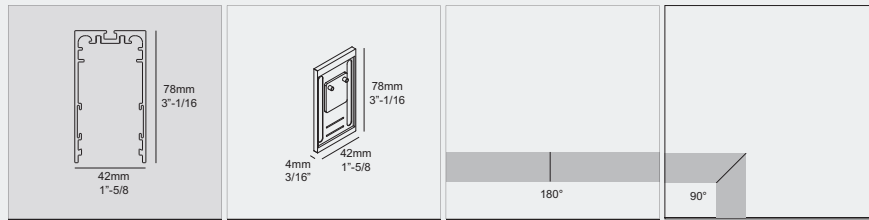


MIC40/40+ - PROFILE	MIC40 - END CAP	MIC - CORNER 180°	MIC - CORNER 90°
6 399 01 00 ◊	399 01 03 01 ◊	399 06 01	399 06 06
◊ ANO / B / W	◊ A / B / W	[0.4]	[0.4]

MAX.L / PROFILE: 19' 8"-1/4
 [3.1] / 3'

2

PROFILE FIXATION



SUSPENSION 2 SINGLE 5'

328 12 01
L 5'
[0.2]

SUSPENSION 2 SINGLE 19'

328 12 06
L 19' 8"-1/4
[0.2]

3

PROFILE CONNECTION



CURRENT SUPPLY L5'

6 399 98 51 - 3 x 18 AWG
6 399 99 51 - 5 x 18 AWG
L 5'
[0.2]

CURRENT SUPPLY L19' 8"-1/4

6 399 98 56 - 3 x 18 AWG
6 399 99 56 - 5 x 18 AWG
L 19' 8"-1/4
[0.2]

OPTIONS
 COVERPLATE S 103 ◊ ► 6 204 99 103 ANO / B / W
 COVERPLATE R 104 ◊ ► 6 204 00 104 ANO / B / W

4

LIGHT MODULES

SEE PAGE PRO 674

PRO


MICROLINE 40+

www.deltalight.us/microline40
www.deltalight.ca/microline40



1

PROFILE CONSTRUCTION

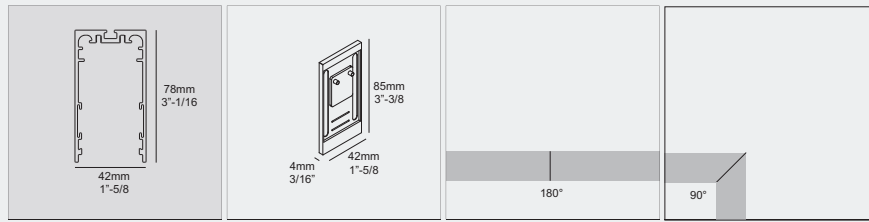


MIC40/40+ - PROFILE	MIC40+ - END CAP	MIC - CORNER 180°	MIC - CORNER 90°
6 399 01 00 ◊	399 02 03 01 ◊	399 06 01	399 06 06

◊ ANO / B / W	◊ A / B / W	0.4	0.4
MAX.L / PROFILE: 19' 8"-1/4	0.2		
3.1 / 3'			

2

PROFILE FIXATION



SUSPENSION 2 SINGLE 5'
328 12 01

L 5'
0.2

SUSPENSION 2 SINGLE 19'
328 12 06

L 19' 8"-1/4
0.2

3

PROFILE CONNECTION



CURRENT SUPPLY L5'
6 399 98 51 - 3 x 18 AWG
6 399 99 51 - 5 x 18 AWG

L 5'
0.2

CURRENT SUPPLY L19' 8"-1/4
6 399 98 56 - 3 x 18 AWG
6 399 99 56 - 5 x 18 AWG

L 19' 8"-1/4

OPTIONS
COVERPLATE S 103 ◊ ► 6 204 99 103 ANO / B / W
COVERPLATE R 104 ◊ ► 6 204 00 104 ANO / B / W


4

LIGHT MODULES

SEE PAGE PRO 674

PRO

MICROLINE 60 40 LED ARRAY DOWN



		3000K / CRI>80	
		3625lm/3' / 171lm/W	
		0-10V DIM	LUTRON ECODIM
12W	L 560mm / 22"-1/16	6 399 610 12 ED1	6 399 610 12 ED13
18W	L 840mm / 33"-1/16	6 399 610 18 ED1	6 399 610 18 ED13
24W	L 1120mm / 44"-1/16	6 399 610 24 ED1	6 399 610 24 ED13
30W	L 1400mm / 55"-1/8	6 399 610 30 ED1	6 399 610 30 ED13
36W	L 1680mm / 66"-1/8	-	6 399 610 36 ED13

		3500K / CRI>80	
		3625lm/3' / 171lm/W	
		0-10V DIM	LUTRON ECODIM
12W	L 560mm / 22"-1/16	6 399 650 12 ED1	6 399 650 12 ED13
18W	L 840mm / 33"-1/16	6 399 650 18 ED1	6 399 650 18 ED13
24W	L 1120mm / 44"-1/16	6 399 650 24 ED1	6 399 650 24 ED13
30W	L 1400mm / 55"-1/8	6 399 650 30 ED1	6 399 650 30 ED13
36W	L 1680mm / 66"-1/8	-	6 399 650 36 ED13

120-277V / 60Hz
IP20 DAMP

PRO

		3500K / CRI>80	3000K / CRI>80
		1879lm/m3' / 185lm/W	1879lm/3' / 185lm/W
		1-10V DIM	
6W	L 560mm / 22"-1/16	6 399 653 06 ED1	6 399 613 06 ED1
9W	L 840mm / 33"-1/16	6 399 653 09 ED1	6 399 613 09 ED1
12W	L 1120mm / 44"-1/16	6 399 653 12 ED1	6 399 613 12 ED1
15W	L 1400mm / 55"-1/8	6 399 653 15 ED1	6 399 613 15 ED1
18W	L 1680mm / 66"-1/8	6 399 653 18 ED1	6 399 613 18 ED1
24W	L 2240mm / 88"-3/16	6 399 653 24 ED1	6 399 613 24 ED1



120-277V / 60Hz
IP20 DAMP

REQUIREMENTS FOR MIC40 / MIC60
MIC 40/60 - PC SBL PROFILE HE / 3' (max.L19' 8"-1/4) ▶ **399 01 02 05 SBL HE**
or
MIC 40/60 - PC SBL PROFILE ROLL 26' ▶ **399 01 02 08 SBL**
or
MIC 40/60 - PC SBL PROFILE ROLL 49' ▶ **399 01 02 15 SBL**

REQUIREMENTS FOR MIC40+
MIC 40+ - PC SBL PROFILE HE / 3' (max.L19' 8"-1/4) ▶ **399 02 02 05 SBL HE**



FOR CONTINUOUS ILLUMINATION OF CORNERS START MODULES AT 1/4" FROM CENTER LINE OF PROFILE

