

NEW

ONE-AND-ONLY


A peculiar profile, both functional as decorative. The design of the body allows you to have up to 5 lines of light out of 1 profile, 3 for direct and 2 for indirect lighting, a powerful blend for an eye-catching look.

www.deltalight.us/oneandonly
www.deltalight.ca/oneandonly



1

PROFILE CONSTRUCTION

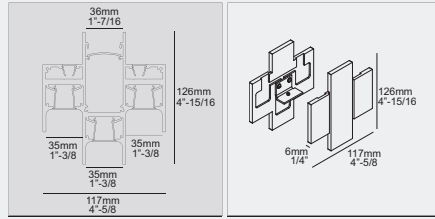

OAO - PROFILE

6 404 00 00 ◊

◊ B / GC / W

INCL.PC SBL HE
 MAX.L / PROFILE: 16' 4"-27/32

11.7 / 3'

OAO - END CAP SET

6 404 03 01 ◊


◊ B / W

SET OF 2 PCS

0.9

2

PROFILE FIXATION

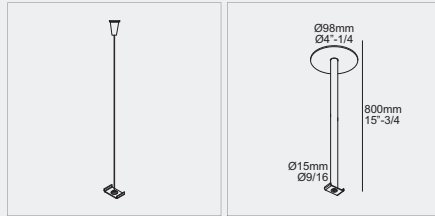

**OAO - CABLE
 SUSPENSION SINGLE 5'**

6 404 09 01

L 5'

0.2

**OAO - ROD
 SUSPENSION 0,4m**

6 328 27 80 ◊


◊ B / W

0.2
 EXCL. CABLING

PRO

3

PROFILE CONNECTION

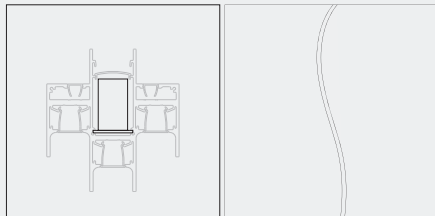

**LED POWER SUPPLY
 24V-DC KIT 60W DIM1**

6 404 24 60 ED1

120V / 60Hz

0.2 IP20 DAMP

CURRENT SUPPLY L5'

6 377 98 51 - 3 x 18 AWG

6 377 99 51 - 5 x 18 AWG

**LED POWER SUPPLY
 24V-DC KIT 100W**

6 404 24 100

120V / 60Hz

0.2 IP20 DAMP

CURRENT SUPPLY L19' 8"-1/4

6 377 98 56 - 3 x 18 AWG

6 377 99 56 - 5 x 18 AWG

OPTIONS

COVERPLATE S 103 ◊ ► 6 204 99 103 ANO / B / W
 COVERPLATE R 104 ◊ ► 6 204 00 104 ANO / B / W

4

LIGHT MODULES

SEE PAGE PRO 708

LEDFLEX WHITE



5m / 16'-3/8- 24V-DC
MOUNTED

0.7

24V-DC / Class 2

Dividable per
55mm / 2"-3/16
128 smd LED/3'

9,8W/3'
1000lm/3' *

CRI > 90

LEDFLEX IN MP

4000K ●	IN	300 91 56 94
3500K ●	IN	300 91 56 95
3000K ●	IN	300 91 56 93
2700K ●	IN	300 91 56 92
LED POWER SUPPLY / INFO PAG TEC		
24V-DC / 96W DIM1 6 300 89 24 96 ED1		max.32'-1/8 (max.9' / Powerline)
24V-DC / 96W DIM8 6 300 89 24 96 ED8		max.32'-1/8 (max.9' / Powerline)

DIM1: dimming by 0-10V
DIM8: mains dimmable

*+/- 5%

PRO

